


胀紧联结套 Keyless Locking Devices

胀紧联结套-R03型

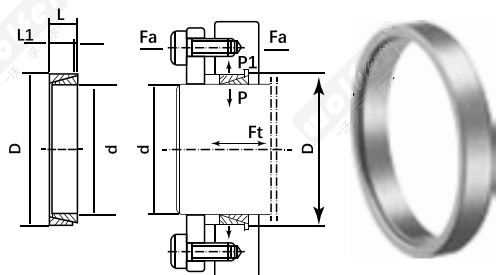

推荐安装尺寸:

名义尺寸小于等于38mm:

轴: h6 毂: H7

名义尺寸大于等于40mm:

轴: h8 毂: H8

标记示例:

R03- 8- 11

外径 Dia

内径 Bore

型号 Code

The dimension to fix (suggestion):

Nominal dimension less than 38mm:

shaft: h6 hub: H7

Nominal dimension more than 40mm:

shaft: h8 hub: H8

类似JB/T 7934 Z1型胀套

尺寸 Dimensions				加载的轴向压力 Axial Force	传递的轴向力 Axial Force Torque	传递扭矩 Torque	接触面压强 Contact Pressure		重量 Weight
Φd mm	ΦD mm	L mm	L1 mm				轴 Shaft P N/mm ²	毂 Hub P1 N/mm ²	
8	11	4.5	3.7	9.1	1.09	4.3	98	72	0.002
10	13	4.5	3.7	12.1	1.37	6.9	98	75	0.002
12	15	4.5	3.7	12.4	1.64	9.8	98	78	0.002
13	16	4.5	3.7	12.7	1.80	12.0	98	79	0.002
14	18	6.3	5.3	20.4	2.74	19.2	98	76	0.005
15	19	6.3	5.3	23.5	2.94	22.1	98	77	0.005
16	20	6.3	5.3	23.9	3.14	25.1	98	78	0.006
17	21	6.3	5.3	24.2	3.33	28.3	98	79	0.006
18	22	6.3	5.3	24.8	3.53	31.8	98	80	0.007
19	24	6.3	5.3	29.1	3.72	35.3	98	77	0.007
20	25	6.3	5.3	29.5	3.92	39.2	98	78	0.009
22	26	6.3	5.3	28.3	4.31	47.0	98	83	0.007
24	28	6.3	5.3	29.4	4.70	56.8	98	84	0.008
25	30	6.3	5.3	31.8	4.90	60.8	98	81	0.009
28	32	6.3	5.3	31.9	5.49	76.4	98	86	0.010
30	35	6.3	5.3	34.8	5.88	88.2	98	84	0.011
32	36	6.3	5.3	35.9	6.27	100.0	98	87	0.011
35	40	7.0	6.0	44.8	7.74	136.0	98	86	0.016
36	42	7.0	6.0	47.3	7.94	144.0	98	84	0.019
38	44	7.0	6.0	48.8	8.43	160.0	98	84	0.021
40	45	8.0	6.6	57.6	9.75	195.0	98	87	0.021
42	48	8.0	6.6	61.4	10.30	216.0	98	86	0.026
45	52	10.0	8.6	90.3	14.30	321.0	98	85	0.045
48	55	10.0	8.6	92.7	15.30	367.0	98	85	0.043
50	57	10.0	8.6	94.7	15.90	397.0	98	86	0.045
55	62	10.0	8.6	99.7	17.40	480.0	98	87	0.049
56	64	12.0	10.4	125.6	21.60	603.0	98	86	0.070
60	68	12.0	10.4	130.9	23.00	692.0	98	86	0.070
63	71	12.0	10.4	134.6	24.20	764.0	98	87	0.080
65	73	12.0	10.4	134.9	25.00	813.0	98	87	0.090
70	79	14.0	12.2	172.4	31.60	1110.0	98	87	0.115
71	80	14.0	12.2	174.0	32.00	1140.0	98	87	0.110
75	84	14.0	12.2	185.7	33.80	1260.0	98	87	0.120
80	91	17.0	15.0	247.1	44.10	1770.0	98	86	0.210
90	101	17.0	15.0	266.2	50.00	2240.0	98	87	0.220
100	114	21.0	18.7	370.8	69.60	3450.0	98	86	0.390
110	124	21.0	18.7	406.1	76.40	4170.0	98	87	0.420
120	134	21.0	18.7	432.0	83.30	4950.0	98	88	0.460
130	148	28.0	25.3	640.8	122.00	7840.0	98	86	0.860
140	158	28.0	25.3	676.5	131.00	9110.0	98	87	0.960
150	168	28.0	25.3	713.0	140.00	10500.0	98	87	1.000