




胀紧联结套 Keyless Locking Devices

胀紧联结套 R33型

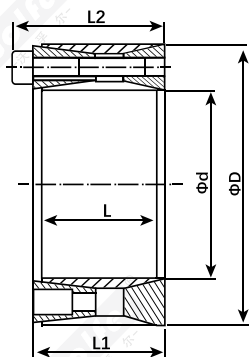

推荐安装尺寸: The dimension to fix (suggestion):

轴: h8 Shaft: h8

毂: H8 Hub: H8

标记示例:

R33-70-120

外径 Dia

内径 Bore

型号 Code

类似 JB/T 7934 Z4 型胀套

尺寸 Dimensions					传递的 轴向力 Axial Force	传递 扭矩 Torque	接触面压强 Contact Pressure		DIN912-12.9级锁紧螺钉 Locking Screws DIN912-12.9		
							轴 Shaft	毂 Hub	数量	规格	锁紧扭矩 Tightening Torque
d	D	L	L1	L2	Ft	Mt	P	P1	Qty.	Size	TS
mm	mm	mm	mm	mm	KN	Nm	N/mm ²	N/mm ²			Nm
70	120	56	62	74	197	6850	201	117	8	M12x55	145
80	130	56	62	74	291	11650	263	162	12	M12x55	145
90	140	56	62	74	290	13000	234	150	12	M12x55	145
100	160	74	80	94	389	19700	213	133	12	M14x70	230
110	170	74	80	94	483	26600	242	157	14	M14x70	230
120	180	74	80	94	483	28900	222	148	15	M14x70	230
130	190	74	80	94	483	31200	205	140	15	M14x70	230
140	200	74	80	94	574	40200	227	159	17	M14x70	230
150	210	74	80	94	574	42900	212	152	18	M14x70	230
160	230	88	94	110	800	64000	227	158	17	M16x80	355
170	240	88	94	110	800	67800	214	152	18	M16x80	355
180	250	88	94	110	923	83000	235	170	20	M16x80	355
190	260	88	94	110	923	88000	223	163	21	M16x80	355
200	270	88	94	110	1050	105000	242	179	23	M16x80	355
220	300	110	116	134	1120	123000	189	138	21	M18x100	485