

锥套 Taper Bushing



锥 套 Taper Bushing





锥套 Taper Bushing

锥套外形尺寸 Stock Taper Bushings Dimensions

锥套型号 BUSH NO.	大端直径 A	宽度 B	中心圆 D	螺栓规格 SET SCREWS
1008	1.386	7/8	1 ²¹ / ₆₄	1/4x1/2
1108	1.511	7/8	1 ²⁹ / ₆₄	1/4x1/2
1210	1 ⁷ / ₈	1	1 ³ / ₄	3/8x5/8
1215	1 ⁷ / ₈	1 ¹ / ₂	1 ³ / ₄	3/8x5/8
1310	2	1	1 ⁷ / ₈	3/8x5/8
1610	2 ¹ / ₄	1	2 ¹ / ₈	3/8x5/8
1615	2 ¹ / ₄	1 ¹ / ₂	2 ¹ / ₈	3/8x5/8
2012	2 ³ / ₄	1 ¹ / ₄	2 ⁵ / ₈	7/16x7/8
2517	3 ³ / ₈	1 ³ / ₄	3 ¹ / ₄	1/2x1
2525	3 ³ / ₈	2-1/2	3 ¹ / ₄	1/2x1
3020	4 ¹ / ₄	2	4	5/8x1 ¹ / ₄
3030	4 ¹ / ₄	3	4	5/8x1 ¹ / ₄



表示方法

Representation method

1610-28

孔径Bore

型号Bush No

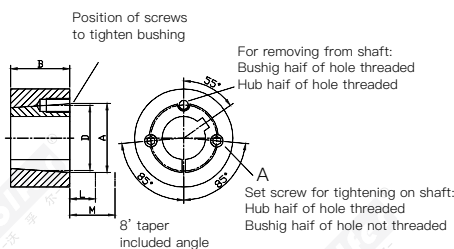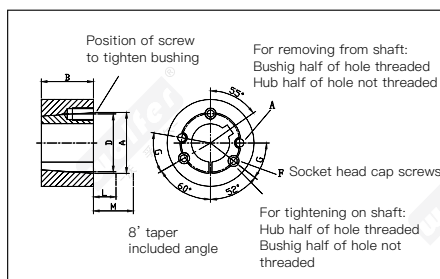

锥套型号 BUSH NO.	A	B	D	螺栓规格 SET SCREWS	G
3525	5	2 ¹ / ₂	4.83	1/2x1 ¹ / ₂	40
3535	5	3 ¹ / ₂	4.83	1/2x1 ¹ / ₂	40
4040	5 ³ / ₄	4	5.54	5/8x1 ³ / ₄	40
4545	6 ³ / ₈	4 ¹ / ₂	6.13	3/4x2	40
5050	7	5	6.72	7/8x2 ¹ / ₄	37

锥套型号 BUSH NO.	锥套内孔规格 BORE
1008	10.11.12.14.15.16.18.19.20.22.24.25
1108	10.11.12.14.15.16.18.19.20.22.24.25.28
1210 1215	11.12.14.15.16.18.19.20.22.24.25.28.30.32
1310	14.15.16.18.19.20.22.24.25.28.30.32.35
1610 1615	14.15.16.18.19.20.22.24.25.28.30.32.35.38.40.42
2012	18.19.20.22.24.25.28.30.32.35.38.40.42.45.48.50
2517 2525	20.22.24.25.28.30.32.35.38.40.42.45.48.50.55.60
3020 3030	25.28.30.32.35.38.40.42.45.48.50.55.60.65.70.75
3525 3535	35.38.40.42.45.48.50.55.60.65.70.75.80.85.90
4030 4040	40.42.45.50.60.65.70.75.80.85.90.95.100
4535 4545	55.60.65.70.75.80.85.90.95.100.105.110
5040 5050	60.65.70.75.80.85.90.95.100.105.110.115.120.125

锥套 Taper Bushing



表示方法


Representation method

6050-80

孔径Bore


型号Bush No

锥套型号 Bush No	A	B	D	Socket Head CapScrews	E	L	M
6050	9 ¹ / ₄	5	9	3-1 ¹ / ₄ x3 ¹ / ₂	6 ³ / ₄	1 ⁵ / ₈	4 ³ / ₈
7060	10 ¹ / ₄	6	10	4-1 ¹ / ₄ x3 ¹ / ₂	7 ³ / ₄	1 ⁵ / ₈	4 ³ / ₈
8065	11 ¹ / ₄	6 ¹ / ₂	11	4-1 ¹ / ₄ x3 ¹ / ₂	8 ³ / ₄	1 ⁵ / ₈	4 ³ / ₈
10085	14 ³ / ₄	8 ¹ / ₂	14 ¹ / ₂	4-1 ¹ / ₂ x4 ¹ / ₄	11 ³ / ₄	2	5 ³ / ₈
120100	17 ¹ / ₄	10	17	6-1 ¹ / ₂ x4 ¹ / ₄	14 ¹ / ₄	2	5 ³ / ₈

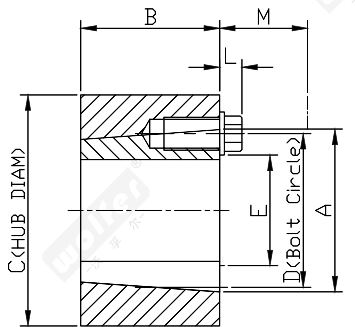


A-A

8° taper
included angle

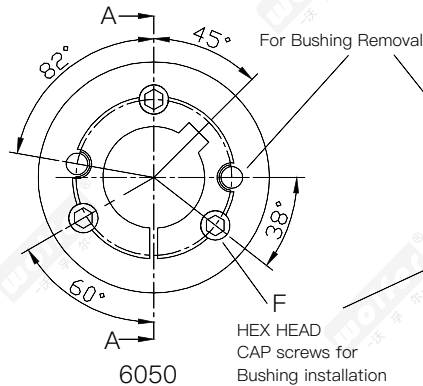


6050

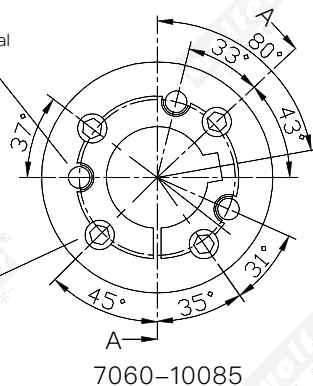

7060-10085

锥套型号 Bush No	英制孔径 inches bore		公制孔径 metric bore	
	Min	Max	Min	Max
6065	4 ⁷ / ₁₆	6	80	150
7060	4 ¹⁵ / ₁₆	7	90	175
8065	5 ⁷ / ₁₆	8	110	200
10085	7	10	175	250
12100	8	12	200	300





锥套 Taper Bushing

锥套孔径和相应的键槽尺寸(公制) Taper Bushing Keyway (mm)

锥套 型号 Bush No	锥套 孔径 Bore	锥套键槽 Bushing Keyway	锥套 型号 Bush No	锥套 孔径 Bore	锥套键槽 Bushing Keyway	锥套 型号 Bush No	锥套 孔径 Bore	锥套键槽 Bushing Keyway	锥套 型号 Bush No	锥套 孔径 Bore	锥套键槽 Bushing Keyway	锥套 型号 Bush No	锥套 孔径 Bore	锥套键槽 Bushing Keyway	锥套 型号 Bush No	锥套 孔径 Bore	锥套键槽 Bushing Keyway
1008	10	3x1.40	1610	14	5x2.30	2517	20	6x2.80	3020	25	8x3.30	3535	35	10x3.30	4545	55	16x4.30
	11	4x1.80		16			22			28			38			60	18x4.40
	12			18			24			30			40	12x3.30		65	
	14	5x2.30		19	6x2.80		25	8x3.30		32			42			70	20x4.90
	16			20			28			35	10x3.30		45			75	
	18			22			30			38			48	14x3.80		80	22x5.40
	19	6x2.80		24			32	10x3.30		40	12x3.30		50			85	
	20			25	8x3.30		35			42			55	16x4.30		90	25x5.40
	22			28			38			45			60	18x4.40		95	
	24	8x2.00		30			40	12x3.30		48	14x3.80		65			100	
1108	25	8x1.30	1615	32	10x3.30	2525	42	12x3.30	3030	50	16x4.30	4040	70	20x4.90	5050	105	28x6.40
	10	3x1.40		35			45			55			75			110	
	11	4x1.80		38			48	14x3.80		60	18x4.40		80	22x5.40			
	12			40	12x3.30		50			65			85				
	14	5x2.30		42	12x2.20		55	16x4.30		70	20x4.90		90	25x5.40			
	16						60	18x4.40		75			90				
	18			14	5x2.30												
	19	6x2.80		16													
	20			18													
	22			19	6x2.80												
1210	24		1615	20		2525	20	6x2.80	3030	25	8x3.30	4040	40	12x3.30	5050	60	18x4.40
	25	8x2.00		22			22			28			42			65	
	11	4x1.80		24	8x3.30		24			30	10x3.30		45	14x3.80		70	20x4.90
	12			25			25	8x3.30		32			48			75	
	14	5x2.30		28			28			35	10x3.30		50	16x4.30		80	22x5.40
	16			30	10x3.30		30			38			55	18x4.40		85	
	18	6x2.80		32			32	10x3.30		40	12x3.30		60			90	25x5.40
	19			35			35			42			65	20x4.90		95	
	20			38	12x3.30		40	12x3.30		45	14x3.80		70			100	28x6.40
	22			40	12x2.20		42			50			75	22x5.40		105	
1215	24		2012	42		2525	45	14x3.80	3030	55	16x4.30	4040	80	22x5.40	5050	110	32x7.40
	25	8x3.30		44			48			60	18x4.40		85			115	
	28			46	6x2.8		50	16x4.30		65			90	25x5.40		120	
	11	4x1.80		48			55	18x4.40		70	20x4.90		95			125	
	12			50	8x3.3		60			75			100	28x6.40			
	14	5x2.30		52													
	16			54	10x3.3												
	18	6x2.80		56													
	19			58	12x3.3												
	20			60	14x3.8												
1310	22		2012	62		2525			3030			4040			5050		
	24	8x3.30		64													
	25			66	10x3.3												
	28			68	12x3.3												
	30	10x3.30		70													
	14	5x2.30		72													
	16			74	14x3.8												
	18	6x2.80		76													
	19			78													
	20			80													

锥套 Taper Bushing




表示方法:

Representation method


SD-25

孔径Bore


型号Bush No



"JA"TD"J"



"M"TD"W"



衬套 Bushing	尺寸(Inches) Dimension							平头螺 钉要求 Cap ScrRews Required	孔径范围 Stock Bore Range			平均 Average
	C	D	L	M	N	E	螺栓分 布圆 Bolt Circle		最小 Minimum	最大 Maximum		重量 (约) Weight (Approx)
										标准键槽 Standard Keyway	浅键槽 Shallow Keyway	
JA	5/16	2	1	0.20	1.375	11/16	1.656	3-M5×25	3/8	1	11/16	0.9
SH	7/16	2 11/16	15/16	0.23	1.871	7/8	2 1/4	3-1/4×13/8	1/2	13/8	1 1/2	1.0
SDS	7/16	3 1/8	15/16	0.23	2.187	7/8	2 11/16	3-1/4×13/8	1/2	15/8	1 13/16	1.0
SD	7/16	3 1/8	1 13/16	0.23	2.187	13/8	2 11/16	3-1/4×13/8	1/2	15/8	1 9/16	1.5
SK	9/16	3 7/8	1 15/16	0.23	2.812	13/8	3 5/16	3-5/16×2	1/2	2 1/8	2 1/4	2.0
SF	5/8	4 5/8	2 1/16	0.23	3.125	1 7/16	3 7/8	3-3/8×2	1/2	2 1/4	2 7/16	4.0
E	7/8	6	2 3/4	9/32	3.834	1 7/8	5	3-1/2×2 3/4	7/8	2 7/8	2 13/16	10.5
F	1	6 5/8	3 3/4	11/32	4.437	2 3/4	5 5/8	3-9/16×3 5/8	1	3 1/4	3 11/16	15.0
J	1 1/8	7 1/4	4 5/8	5/16	5.148	3 1/2	6 1/4	3-5/8×4 1/2	1 1/2	3 13/16	3 7/8	23.0
M	1 1/4	9	6 3/4	11/32	6.494	5 1/2	7 7/8	4-3/4×6 3/4	2	4 11/16	5 1/2	55.0
N	1 1/2	10	8 1/8	9/16	6.992	8 5/8	8 1/2	4-7/8×8	2 7/16	5 1/16	5 1/2	73.0
P+	1 3/4	11 3/4	9 3/8	5/8	8.242	7 5/8	10	4-1×9 1/2	2 15/16	2 13/16	5 13/16	120.0
W+	2	15	11 3/8	1 1/16	10.437	9 3/8	12 3/4	4-1 1/8×11 1/2	4	7 1/2		250.0
S+	3 1/4	17 3/4	15 3/4	3/4	12.125	12 1/12	15 6	5-1 1/4×15 1/2	6	8 1/4		400.0