

同步带轮 Timing Belt pulleys



同步带轮 Timing Belt pulleys



锥孔 (L-H)
Taper Bushes (L-H)



同步带轮 Timing Belt pulleys

锥孔(L) Taper Bushes(L)

L型齿形图: Tooth form diagram

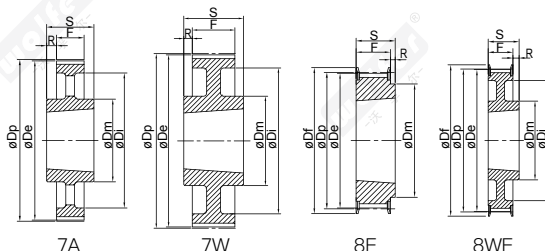

表示方法: Representation method

TL22-L-050-1108-8F

- 轮形代号 Pulley code
- 锥套型号 Bush
- 配带宽代号 0.5英寸
Matching belt width
code 0.5inch
- 型号, 节距 9.525
Type, Pitch 9.525
- 齿数 NO.OF Grooves

HTD 14M-40 For belt width 40mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18L050	18	8F	STEEL	1108	54.57	53.81	60.0	45	-	19	22	3.0	58
TL19L050	19	8F	STEEL	1108	57.61	56.84	64.0	45	-	19	22	3.0	59
TL20L050	20	8F	STEEL	1108	60.64	59.88	66.5	48	-	19	22	3.0	60
TL21L050	21	8F	STEEL	1108	63.67	62.91	70.0	48	-	19	22	3.0	61
TL22L050	22	8F	STEEL	1108	66.70	65.94	75.0	51	-	19	22	3.0	62
TL23L050	23	8F	STEEL	1108	69.73	68.97	79.0	54	-	19	22	3.0	63
TL24L050	24	8F	STEEL	1108	72.77	72.00	79.0	54	-	19	22	3.0	63
TL25L050	25	8F	STEEL	1108	75.80	75.04	82.5	56	-	19	22	3.0	64
TL26L050	26	8F	STEEL	1108	78.83	78.07	86.0	60	-	19	22	3.0	65
TL27L050	27	8F	STEEL	1108	81.86	81.10	86.0	62	-	19	22	3.0	65
TL28L050	28	8F	STEEL	1108	84.89	84.13	91.0	65	-	19	22	3.0	66
TL30L050	30	8F	STEEL	1108	90.96	90.20	97.0	70	-	19	22	3.0	68
TL32L050	32	8F	STEEL	1108	97.02	96.26	102.0	74	-	19	22	3.0	70
TL36L050	36	8F	STEEL	1108	109.15	108.39	115.0	85	-	19	22	3.0	74
TL40L050	40	8F	STEEL	1610	121.28	120.51	128.0	88	-	19	25	6.0	78
TL44L050	44	8WF	STEEL	1610	133.40	132.64	142.0	88	110	19	25	6.0	81
TL48L050	48	8WF	STEEL	1610	145.53	144.77	150.0	88	120	19	25	6.0	85
TL60L050	60	7W	STEEL	1610	181.91	181.15	-	92	166	19	25	3.0	-
TL72L050	72	7A	CAST IRON	1610	218.30	217.53	-	92	202	19	25	3.0	-
TL84L050	84	7A	CAST IRON	1610	254.68	253.90	-	92	236	19	25	3.0	-
TL96L050	96	7A	CAST IRON	2012	291.06	290.30	-	106	270	19	32	6.5	-
TL120L050	120	7A	CAST IRON	2012	363.83	363.07	-	106	343	19	32	6.5	-

同步带轮 Timing Belt pulleys



锥孔(L)Tooth from diagram

L型齿形图: Tooth from diagram

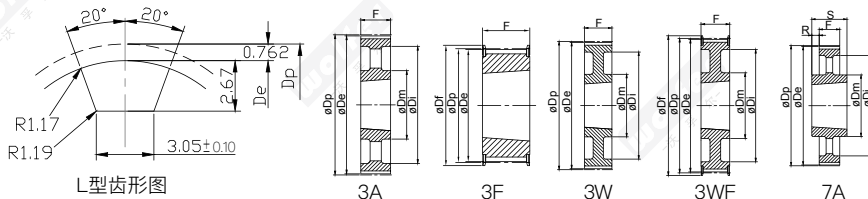

表示方法: Representation method

TL22 L 075 1108 3F
 轮形代号 Pulley code
 锥套型号 Bush
 配带宽度代号0.75英寸
 Matching belt width
 code 0.75inch
 型号,节距9.525
 Type,Pitch 9.525
 齿数 NO.OF Grooves



L 075 (9.525mm) For belt width 19.1mm

规格代码 Part Code	齿数 Number of Teett	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18L075	18	3F	STEEL	1108	54.57	53.81	60.0	-	-	25	25	-	58
TL19L075	19	3F	STEEL	1108	57.61	56.84	64.0	-	-	25	25	-	59
TL20L075	20	3F	STEEL	1108	60.64	59.88	66.5	-	-	25	25	-	60
TL21L075	21	3F	STEEL	1108	63.67	62.91	70.0	-	-	25	25	-	61
TL22L075	22	3F	STEEL	1108	66.70	65.94	75.0	-	-	25	25	-	62
TL23L075	23	3F	STEEL	1108	69.73	68.97	79.0	-	-	25	25	-	63
TL24L075	24	3F	STEEL	1108	72.77	72.00	79.0	-	-	25	25	-	63
TL25L075	25	3F	STEEL	1108	75.80	75.04	82.5	-	-	25	25	-	64
TL26L075	26	3F	STEEL	1108	78.83	78.07	86.0	-	-	25	25	-	65
TL27L075	27	3F	STEEL	1108	81.86	81.10	86.0	-	-	25	25	-	65
TL28L075	28	3F	STEEL	1108	84.89	84.13	91.0	-	-	25	25	-	66
TL30L075	30	3F	STEEL	1108	90.96	90.20	97.0	-	-	25	25	-	68
TL32L075	32	3F	STEEL	1108	97.02	96.26	102.0	-	-	25	25	-	70
TL36L075	36	3F	STEEL	1610	109.15	108.39	115.0	-	-	25	25	-	74
TL40L075	40	3F	STEEL	1610	121.28	120.51	128.0	-	-	25	25	-	78
TL44L075	44	3WF	STEEL	1610	133.40	132.64	142.0	90	110	25	25	-	81
TL48L075	48	3WF	STEEL	1610	145.53	144.77	150.0	92	120	25	25	-	85
TL60L075	60	3W	STEEL	1610	181.91	181.15	-	92	166	25	25	-	-
TL72L075	72	3A	CAST IRON	1610	218.30	217.53	-	92	202	25	25	-	-
TL84L075	84	7A	CAST IRON	2012	254.68	253.90	-	92	236	25	32	3.5	-
TL96L075	96	7A	CAST IRON	2012	291.06	290.30	-	106	270	25	32	3.5	-
TL120L075	120	7A	CAST IRON	2012	363.83	363.07	-	106	343	25	32	3.5	-


同步带轮 Timing Belt pulleys

锥孔(L) Taper Bushes(L)

L型齿形图: Tooth form diagram

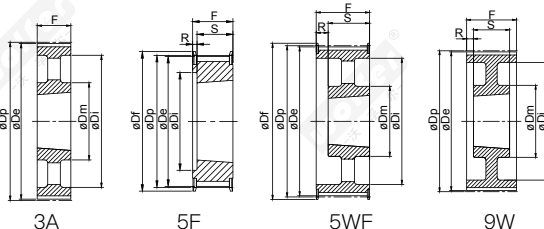

表示方法: Representation method

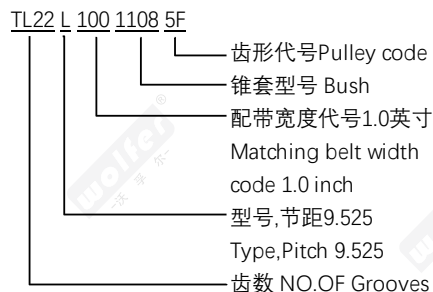

L 100 (9.525mm) For belt width 25.4mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18L100	18	5F	STEEL	1108	54.57	53.81	60.0	-	38	31	22	9.0	58
TL19L100	19	5F	STEEL	1108	57.61	56.84	64.0	-	38	31	22	9.0	59
TL20L100	20	5F	STEEL	1108	60.64	59.88	66.5	-	45	31	22	9.0	60
TL21L100	21	5F	STEEL	1108	63.67	62.91	70.0	-	45	31	22	9.0	61
TL22L100	22	5F	STEEL	1108	66.70	65.94	75.0	-	48	31	22	9.0	62
TL23L100	23	5F	STEEL	1108	69.73	68.97	79.0	-	52	32	22	10.0	63
TL24L100	24	5F	STEEL	1108	72.77	72.00	79.0	-	52	32	22	10.0	63
TL25L100	25	5F	STEEL	1108	75.80	75.04	82.5	-	54	32	22	10.0	64
TL26L100	26	5F	STEEL	1108	78.83	78.07	86.0	-	60	32	22	10.0	65
TL27L100	27	5F	STEEL	1108	81.86	81.10	86.0	-	60	32	22	10.0	65
TL28L100	28	5F	STEEL	1108	84.89	84.13	91.0	-	65	32	22	10.0	66
TL30L100	30	5F	STEEL	1210	90.96	90.20	97.0	-	71	32	25	7.0	68
TL32L100	32	5F	STEEL	1210	97.02	96.26	102.0	-	75	32	25	7.0	70
TL36L100	36	5F	STEEL	1610	109.15	108.39	115.0	-	86	32	25	7.0	74
TL40L100	40	5F	STEEL	1610	121.28	120.51	128.0	-	96	32	25	7.0	78
TL44L100	44	5WF	STEEL	1610	133.40	132.64	142.0	90	110	32	25	7.0	81
TL48L100	48	5WF	STEEL	1610	145.53	144.77	150.0	92	120	32	25	7.0	85
TL60L100	60	9W	STEEL	1610	181.91	181.15	-	92	166	32	25	3.5	-
TL72L100	72	3A	CAST IRON	2012	218.30	217.53	-	92	202	32	32	-	-
TL84L100	84	3A	CAST IRON	2012	254.68	253.90	-	92	236	32	32	-	-
TL96L100	96	3A	CAST IRON	2012	291.06	290.30	-	106	270	32	32	-	-
TL120L100	120	3A	CAST IRON	2012	363.83	363.07	-	106	343	32	32	-	-

同步带轮 Timing Belt pulleys



锥孔(H) Taper Bushes(H)

H型齿形图: Tooth form diagram

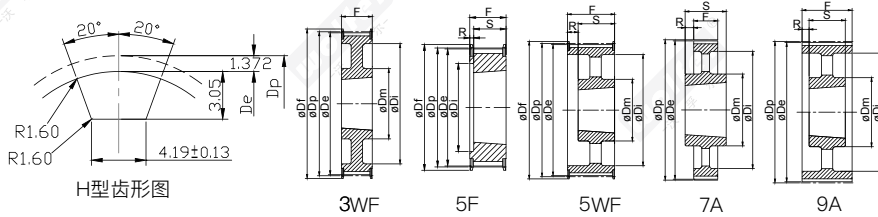

表示方法: Representation method

TL22 H 100 1210 5F

- 齿形代号Pulley code
- 锥套型号 Bush
- 配带宽度代号1.0英寸
Matching belt width
code 1.0 inch
- 型号,节距12.7
Type,Pitch 12.7
- 齿数 NO.OF Grooves



H 100 (12.700mm) For belt width 25.4mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL16H100	16	5F	STEEL	1108	64.68	63.31	70.0	-	45	31	22	9.0	61
TL18H100	18	5F	STEEL	1210	72.77	71.39	79.0	-	52	31	25	6.0	63
TL19H100	19	5F	STEEL	1210	76.81	75.44	82.5	-	56	31	25	6.0	64
TL20H100	20	5F	STEEL	1210	80.85	79.48	87.0	-	60	31	25	6.0	76
TL21H100	21	5F	STEEL	1210	84.89	83.52	91.0	-	64	32	25	7.0	66
TL22H100	22	5F	STEEL	1210	88.94	87.56	94.0	-	67	32	25	7.0	67
TL23H100	23	5F	STEEL	1610	92.98	91.61	97.0	-	70	32	25	7.0	68
TL24H100	24	5F	STEEL	1610	97.02	95.65	102.0	-	74	32	25	7.0	70
TL25H100	25	5F	STEEL	1610	101.06	99.69	106.0	-	77	32	25	7.0	71
TL26H100	26	5F	STEEL	1610	105.11	103.73	112.0	-	82	32	25	7.0	72
TL27H100	27	5F	STEEL	1610	109.15	107.78	115.0	-	85	32	25	7.0	74
TL28H100	28	5F	STEEL	1610	113.19	111.82	120.0	-	90	32	25	7.0	75
TL30H100	30	5F	STEEL	1610	121.28	119.90	128.0	-	98	32	25	7.0	78
TL32H100	32	5WF	STEEL	1610	129.36	127.99	135.0	80	106	32	25	7.0	80
TL36H100	36	5WF	STEEL	1610	145.53	144.16	150.0	92	121	32	25	7.0	85
TL40H100	40	5WF	STEEL	1610	161.70	160.33	168.0	92	138	32	25	7.0	90
TL44H100	44	3WF	STEEL	2012	177.87	176.50	184.0	106	152	32	32	0.0	95
TL48H100	48	3WF	STEEL	2012	194.04	192.67	200.0	106	169	32	32	0.0	100
TL60H100	60	9A	CAST IRON	2012	242.55	241.18	-	92	223	34	32	1.0	-
TL72H100	72	9A	CAST IRON	2012	291.06	289.69	-	92	270	34	32	1.0	-
TL84H100	84	9A	CAST IRON	2012	339.57	338.20	-	92	318	34	32	1.0	-
TL96H100	96	7A	CAST IRON	2517	388.08	386.71	-	106	366	34	45	5.5	-
TL120H100	120	7A	CAST IRON	2517	485.10	483.73	-	106	462	34	45	5.5	-

同步带轮 Timing Belt pulleys

锥孔(H) Taper Bushes(H)

H型齿形图: Tooth form diagram

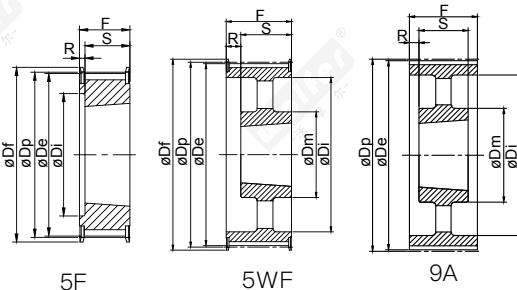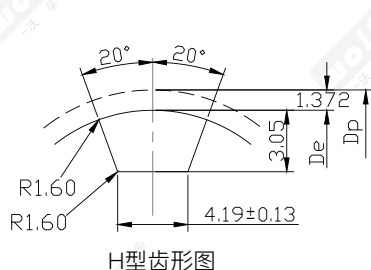

表示方法: Representation method

TL22 H 150 1210 5F
 轮形代号 Pulley code
 锥套型号 Bush
 配带宽度代号1.5英寸
 Matching belt width
 code 1.5 inch
 型号,节距12.7
 Type,Pitch 12.7
 齿数 NO.OF Grooves

H 150 (12.700mm) For belt width 38.1mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18H150	18	5F	STEEL	1210	72.77	71.39	79.0	-	52	45	25	20.0	63
TL19H150	19	5F	STEEL	1210	76.81	75.44	82.5	-	56	45	25	20.0	64
TL20H150	20	5F	STEEL	1210	80.85	79.48	87.0	-	60	45	25	20.0	76
TL21H150	21	5F	STEEL	1210	84.89	83.52	91.0	-	64	45	25	20.0	66
TL22H150	22	5F	STEEL	1210	88.94	87.56	94.0	-	67	45	25	20.0	67
TL23H150	23	5F	STEEL	1610	92.98	91.61	97.0	-	70	45	25	20.0	68
TL24H150	24	5F	STEEL	1610	97.02	95.65	102.0	-	74	45	25	20.0	70
TL25H150	25	5F	STEEL	1610	101.06	99.69	106.0	-	77	45	25	20.0	71
TL26H150	26	5F	STEEL	1610	105.11	103.73	112.0	-	82	45	25	20.0	72
TL27H150	27	5F	STEEL	1610	109.15	107.78	115.0	-	85	45	25	20.0	74
TL28H150	28	5F	STEEL	1610	113.19	111.82	120.0	-	90	45	25	20.0	75
TL30H150	30	5F	STEEL	1610	121.28	119.90	128.0	-	98	45	25	20.0	78
TL32H150	32	5WF	STEEL	1610	129.36	127.99	135.0	80	106	45	25	20.0	80
TL36H150	36	5WF	STEEL	1610	145.53	144.16	150.0	92	121	45	25	20.0	85
TL40H150	40	5WF	STEEL	1610	161.70	160.33	168.0	92	138	45	25	20.0	90
TL44H150	44	5WF	STEEL	2012	177.87	176.50	184.0	106	152	45	32	13.0	95
TL48H150	48	5WF	STEEL	2012	194.04	192.67	200.0	106	169	45	32	13.0	100
TL60H150	60	9A	CAST IRON	2012	242.55	241.18	-	92	223	46	32	7.5	-
TL72H150	72	9A	CAST IRON	2012	291.06	289.69	-	92	270	46	32	7.5	-
TL84H150	84	9A	CAST IRON	2012	339.57	338.20	-	92	318	46	32	7.5	-
TL96H150	96	9A	CAST IRON	2517	388.08	386.71	-	106	366	46	45	0.5	-
TL120H150	120	9A	CAST IRON	2517	485.10	483.73	-	106	462	46	45	0.5	-



同步带轮 Timing Belt pulleys

锥孔(H) Taper Bushes(H)

H型齿形图: Tooth form diagram

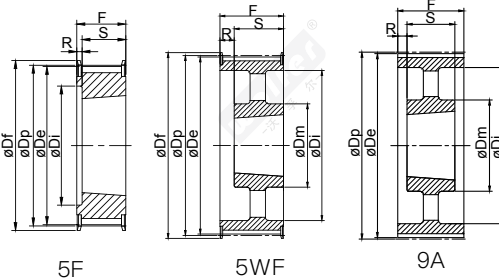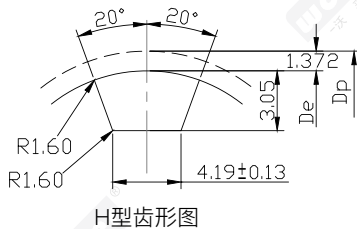

表示方法: Representation method

TL22 H 200 1610 5F

- └─ 轮形代号 Pulley code
- └─ 锥套型号 Bush
- └─ 配带宽度代号 2.0英寸
Matching belt width
code 2.0 inch
- └─ 型号, 节距 12.7
Type, Pitch 12.7
- └─ 齿数 NO.OF Grooves



H 200 (12.700mm) For belt width 50.8mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18H200	18	5F	STEEL	1210	72.77	71.39	79.0	-	52	58	25	33.0	63
TL19H200	19	5F	STEEL	1210	76.81	75.44	82.5	-	56	58	25	33.0	64
TL20H200	20	5F	STEEL	1610	80.85	79.48	87.0	-	60	58	25	33.0	76
TL21H200	21	5F	STEEL	1610	84.89	83.52	91.0	-	64	58	25	33.0	66
TL22H200	22	5F	STEEL	1610	88.94	87.56	94.0	-	67	58	25	33.0	67
TL23H200	23	5F	STEEL	1610	92.98	91.61	97.0	-	70	58	25	33.0	68
TL24H200	24	5F	STEEL	1610	97.02	95.65	102.0	-	74	58	25	33.0	70
TL25H200	25	5F	STEEL	1610	101.06	99.69	106.0	-	77	58	25	33.0	71
TL26H200	26	5F	STEEL	1610	105.11	103.73	112.0	-	82	58	25	33.0	72
TL27H200	27	5F	STEEL	1610	109.15	107.78	115.0	-	85	58	25	33.0	74
TL28H200	28	5F	STEEL	1610	113.19	111.82	120.0	-	90	58	25	33.0	75
TL30H200	30	5F	STEEL	1610	121.28	119.90	128.0	-	98	58	25	33.0	78
TL32H200	32	5F	STEEL	2012	129.36	127.99	135.0	-	106	58	32	26.0	80
TL36H200	36	5WF	STEEL	2012	145.53	144.16	150.0	102	121	58	32	26.0	85
TL40H200	40	5WF	STEEL	2012	161.70	160.33	168.0	106	138	58	32	26.0	90
TL44H200	44	5WF	STEEL	2012	177.87	176.50	184.0	106	152	58	32	26.0	95
TL48H200	48	5WF	STEEL	2517	194.04	192.67	200.0	119	169	58	45	13.0	100
TL60H200	60	9A	CAST IRON	2517	242.55	241.18	-	119	223	60	45	7.5	-
TL72H200	72	9A	CAST IRON	2517	291.06	289.69	-	119	270	60	45	7.5	-
TL84H200	84	9A	CAST IRON	2517	339.57	338.20	-	119	318	60	45	7.5	-
TL96H200	96	9A	CAST IRON	2517	388.08	386.71	-	119	366	60	45	7.5	-
TL120H200	120	9A	CAST IRON	2517	485.10	483.73	-	119	462	60	45	7.5	-

同步带轮 Timing Belt pulleys

锥孔(H) Taper Bushes(H)

H型齿形图: Tooth form diagram

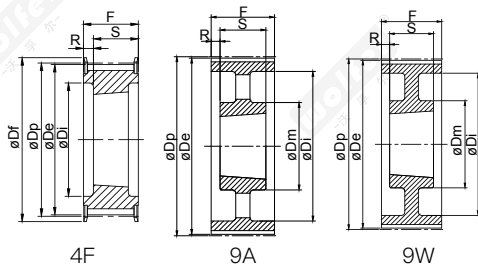

表示方法: Representation method

TL22 H 300 1615 4F
 轮形代号Pulley code
 锥套型号 Bush
 配带宽度代号3.0英寸
 Matching belt width
 code 3.0 inch
 型号,节距12.7
 Type,Pitch 12.7
 齿数 NO.OF Grooves

H 300 (12.700mm) For belt width 76.2mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL20H300	20	4F	STEEL	1615	80.85	79.48	87	-	60	84	38	23.0	76
TL21H300	21	4F	STEEL	1615	84.89	83.52	91	-	64	84	38	23.0	66
TL22H300	22	4F	STEEL	1615	88.94	87.56	94	-	67	84	38	23.0	67
TL23H300	23	4F	STEEL	1615	92.98	91.61	97	-	70	84	38	23.0	68
TL24H300	24	4F	STEEL	1615	97.02	95.65	102	-	74	84	38	23.0	70
TL25H300	25	4F	STEEL	1615	101.06	99.69	106	-	77	84	38	23.0	71
TL26H300	26	4F	STEEL	1615	105.11	103.73	112	-	82	84	38	23.0	72
TL27H300	27	4F	STEEL	2012	109.15	107.78	115	-	85	84	32	26.0	74
TL28H300	28	4F	STEEL	2012	113.19	111.82	120	-	90	84	32	26.0	75
TL30H300	30	4F	STEEL	2012	121.28	119.90	128	-	98	84	32	26.0	78
TL32H300	32	4F	STEEL	2517	129.36	127.99	135	-	106	84	45	19.5	80
TL36H300	36	4F	STEEL	2517	145.53	144.16	150	-	121	84	45	19.5	85
TL40H300	40	4F	STEEL	2517	161.70	160.33	168	-	138	84	45	19.5	90
TL44H300	44	9WF	STEEL	2517	177.87	176.50	184	119	152	86	45	20.5	95
TL48H300	48	9WF	STEEL	2517	194.04	192.67	200	119	169	86	45	20.5	95
TL60H300	60	9A	CAST IRON	2517	242.55	241.18	-	119	223	86	45	20.5	100
TL72H300	72	9A	CAST IRON	2517	291.06	289.69	-	119	270	86	45	20.5	-
TL84H300	84	9A	CAST IRON	2517	339.57	338.20	-	119	318	86	45	20.5	-
TL96H300	96	9A	CAST IRON	3030	388.08	386.71	-	150	366	86	76	5.0	-
TL120H300	120	9A	CAST IRON	3030	485.10	483.73	-	150	462	86	76	5.0	-

同步带轮 Timing Belt pulleys



锥孔(XH) Taper Bushes(XH)

XH型齿形图: Tooth form diagram

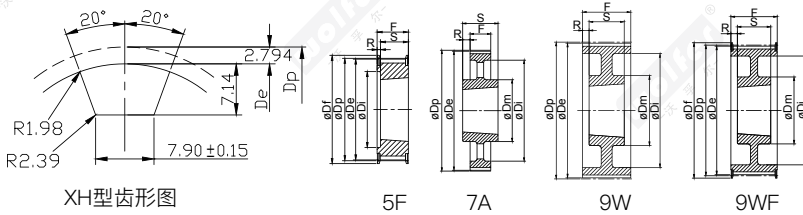

表示方法: Representation method

TL24 XH 200 2517 5F
 轮形代号Pulley code
 锥套型号 Bush
 配带宽度代号2.0英寸
 Matching belt width
 code 2.0 inch
 型号,节距22.225
 Type,Pitch 22.225
 齿数 NO.OF Grooves


XH 200 (22.225mm) For belt width 50.8mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18XH200	18	5F	CASTIRON	2517	127.34	124.55	140	-	95	58	45	13.0	155
TL20XH200	20	5F	CASTIRON	2517	141.49	138.69	155	-	110	58	45	13.0	157
TL22XH200	22	5F	CASTIRON	2517	155.64	152.84	170	-	120	58	45	13.0	159
TL24XH200	24	5F	CASTIRON	2517	169.79	166.99	184	-	135	58	45	13.0	161
TL26XH200	26	5F	CASTIRON	2517	183.94	181.14	198	-	150	58	45	13.0	163
TL28XH200	28	9WF	CASTIRON	2517	198.08	195.29	212	120	165	58	45	6.5	165
TL30XH200	30	9WF	CASTIRON	2517	212.23	209.44	227	120	180	58	45	6.5	167
TL32XH200	32	9WF	CASTIRON	2517	226.38	223.59	240	120	195	58	45	6.5	169
TL40XH200	40	9WF	CASTIRON	3020	282.98	280.18	297	160	245	58	51	3.5	177
TL48XH200	48	9W	CASTIRON	3020	339.57	336.78	-	160	300	58	51	3.5	-
TL60XH200	60	7A	CASTIRON	3535	424.47	421.67	-	190	385	58	89	15.5	-
TL72XH200	72	7A	CASTIRON	3535	509.36	506.56	-	190	470	58	89	15.5	-
TL84XH200	84	7A	CASTIRON	3535	594.25	591.46	-	190	555	58	89	15.5	-
TL96XH200	96	7A	CASTIRON	3535	679.15	676.35	-	190	640	58	89	15.5	-
TL120XH200	120	7A	CASTIRON	3535	848.93	846.14	-	190	810	58	89	15.5	-


同步带轮 Timing Belt pulleys

锥孔(XH) Taper Bushes(XH)


XH型齿形图: Tooth form diagram




XH型齿形图




5F



7A



9A



9WF

表示方法: Representation method

TL22 XH 300 2517 5F

轮形代号 Pulley code

锥套型号 Bush

配带宽度代号 3.0 英寸

Matching belt width

code 3.0 inch

型号, 节距 22.225

Type, Pitch 22.225

齿数 NO.OF Grooves

XH 300 (22.225mm) For belt width 76.2mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18XH300	18	5F	CASTIRON	2517	127.34	124.55	140	-	95	84	45	39.0	155
TL20XH300	20	5F	CASTIRON	2517	141.49	138.69	155	-	110	84	45	39.0	157
TL22XH300	22	5F	CASTIRON	2517	155.64	152.84	170	-	120	84	45	39.0	159
TL24XH300	24	5F	CASTIRON	2517	169.79	166.99	184	-	135	84	45	39.0	161
TL26XH300	26	5F	CASTIRON	2517	183.94	181.14	198	-	150	84	45	39.0	163
TL28XH300	28	5F	CASTIRON	2517	198.08	195.29	212	120	165	84	45	39.0	165
TL30XH300	30	5F	CASTIRON	2517	212.23	209.44	227	120	180	84	45	39.0	167
TL32XH300	32	5F	CASTIRON	2517	226.38	223.59	240	120	195	84	45	39.0	169
TL40XH300	40	9WF	CASTIRON	3020	282.98	280.18	297	160	245	84	51	16.5	177
TL48XH300	48	9A	CASTIRON	3020	339.57	336.78	-	160	300	84	51	16.5	-
TL60XH300	60	7A	CASTIRON	3535	424.47	421.67	-	190	385	84	89	2.5	-
TL72XH300	72	7A	CASTIRON	3535	509.36	506.56	-	190	470	84	89	2.5	-
TL84XH300	84	7A	CASTIRON	4040	594.25	591.46	-	190	555	84	102	9.0	-
TL96XH300	96	7A	CASTIRON	4040	679.15	676.35	-	190	640	84	102	9.0	-
TL120XH300	120	7A	CASTIRON	4040	848.93	846.14	-	190	810	84	102	9.0	-



同步带轮 Timing Belt pulleys

锥孔(XH) Taper Bushes(XH)

XH型齿形图: Tooth form diagram

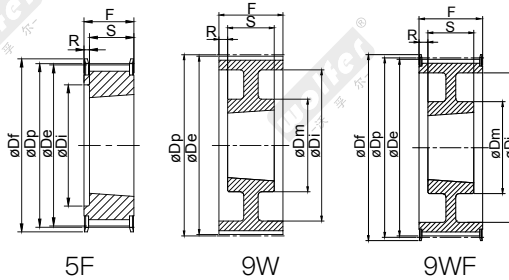

表示方法: Representation method

TL24 XH 400 3020 WF

- 轮形代号 Pulley code
- 锥套型号 Bush
- 配带宽度代号 4.0英寸
Matching belt width
code 4.0 inch
- 型号, 节距 22.225
Type, Pitch 22.225
- 齿数 NO.OF Grooves

XH 400 (22.225mm) For belt width 101.6mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL18XH400	18	9WF	CASTIRON	2517	127.34	124.55	140	-	95	110	45	32.5	155
TL20XH400	20	9WF	CASTIRON	2517	141.49	138.69	155	-	110	110	45	32.5	157
TL22XH400	22	9WF	CASTIRON	2517	155.64	152.84	170	-	120	110	45	32.5	159
TL24XH400	24	9WF	CASTIRON	3020	169.79	166.99	184	-	135	110	51	29.5	161
TL26XH400	26	9WF	CASTIRON	3020	183.94	181.14	198	-	150	110	51	29.5	163
TL28XH400	28	9WF	CASTIRON	3020	198.08	195.29	212	120	165	110	51	29.5	165
TL30XH400	30	9WF	CASTIRON	3020	212.23	209.44	227	120	180	110	51	29.5	167
TL32XH400	32	9WF	CASTIRON	3020	226.38	223.59	240	120	195	110	51	29.5	169
TL40XH400	40	9WF	CASTIRON	3535	282.98	280.18	297	160	245	110	89	10.5	177
TL48XH400	48	9W	CASTIRON	3535	339.57	336.78	-	160	300	110	89	10.5	-
TL60XH400	60	9A	CASTIRON	4040	424.47	421.67	-	190	385	110	102	4.0	-
TL72XH400	72	9A	CASTIRON	4040	509.36	506.56	-	190	470	110	102	4.0	-
TL84XH400	84	9A	CASTIRON	4040	594.25	591.46	-	190	555	110	102	4.0	-
TL96XH400	96	9A	CASTIRON	4040	679.15	676.35	-	190	640	110	102	4.0	-
TL120XH400	120	9A	CASTIRON	4040	848.93	846.14	-	190	810	110	102	4.0	-