


扭力限制器 Torque Limiter

CTX型弹性安全联轴器 CTX Torque Limiter

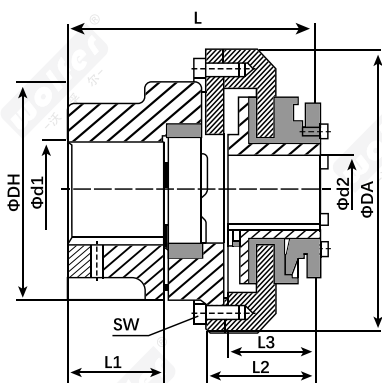


轴与轴连接
扭向弹性力矩限制器
轴向插入,安装方便
能补偿安装偏差
具有缓冲、减振效果
可装在设备上调节打滑力矩
成品孔径差按照ISO标准为H7,键槽宽公差按照标准为JS9

- ◆ shafts connected to each other
- ◆ lateral insertion, easy installation
- ◆ compensating for installation deviation
- ◆ cushion protection
- ◆ installing on the device for adjusting the impact force of slip
- ◆ The finished hole diameter tolerance for H7 according to the ISO, the keyway width tolerance for JS9 according to the standard

CTX型弹性安全联轴器尺寸表

型号	扭矩范围 (Nm)	最高转速 rpm	d1	d2	DA	DH	L	L1	L2	L3	SW
CTX200-101	2.9-9.8	3000	6-19	8-14	70	40	77	25	36	29	6-M4
CTX200-201	6.9-20										
CTX250-102	6.9-27	3000	8-24	10-22	87	55	106	30	58	48	6-M5
CTX250-202	14-54										
CTX350-103	20-74	3000	10-28	17-25	118	65	129	35	74	62	6-M6
CTX350-203	34-149										
CTX500-105	47-210	3000	14-42	20-42	158	95	166	50	90	76	8-M8
CTX500-205	88-420										
CTX700-108	116-569	1900	22-65	30-64	216	135	225	75	115	98	8-M10
CTX700-208	223-1080										

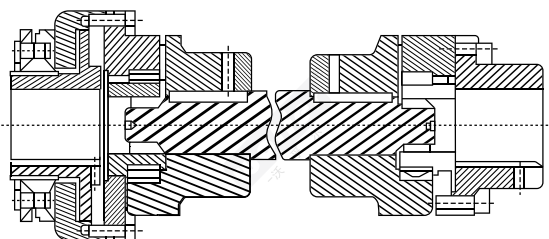

带中间轴联轴器
适合较大的轴间距离
可和钢膜片联轴器组装

- ◆ coupling with intermediate shaft
- ◆ suitable for large distance between shafts
- ◆ assembling diaphragm couplings