

同步带轮 Timing Belt pulleys

直孔 (MXL-XL-L-H)
Plain Bore(MXL-XL-L-H)






同步带轮 Timing Belt pulleys

直孔(MXL) Plain Bore(MXL)

MXL型齿形图: Tooth form diagram

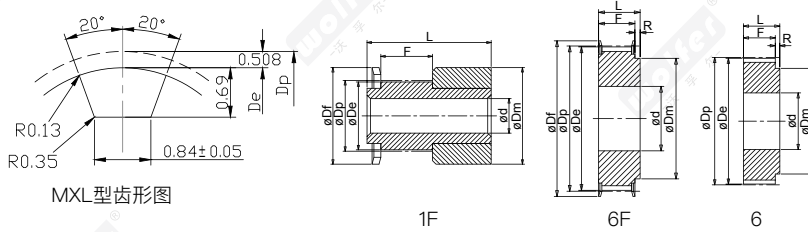

表示方法: Representation method

20-MXL-025-1F

轮形代号Pulley code
配带宽度代号0.25英寸
Matching belt width
code 0.25 inch
型号,节距2.032
Type,Pitch2.032
齿数 NO.OF Grooves

MXL 025 (2.032mm) for belt width 6.35 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
16 MXL 025	16	1F	AL	10.35	9.84	15.0	15	-	8.5	16	-	502
18 MXL 025	18	1F	AL	11.64	11.12	16.0	16	-	8.5	16	-	503
20 MXL 025	20	1F	AL	12.94	12.43	16.0	16	-	8.5	16	-	503
22 MXL 025	22	6F	AL	14.23	13.72	17.5	10	-	11.0	16	-	504
24 MXL 025	24	6F	AL	15.52	15.01	20.0	10	-	11.0	16	-	505
28 MXL 025	28	6F	AL	18.11	17.60	25.0	11	-	11.0	16	-	506
30 MXL 025	30	6F	AL	19.40	18.90	25.0	12	-	11.0	16	-	506
32 MXL 025	32	6F	AL	20.70	20.19	25.0	14	-	11.0	16	-	506
36 MXL 025	36	6F	AL	23.29	22.78	28.0	16	-	11.0	16	-	507
40 MXL 025	40	6F	AL	25.87	25.37	32.0	18	-	11.0	16	-	509
42 MXL 025	42	6F	AL	27.17	26.67	32.0	18	-	11.0	16	-	509
44 MXL 025	44	6F	AL	28.46	27.95	37.0	18	-	11.0	16	-	510
48 MXL 025	48	6	AL	31.05	30.54	-	20	-	11.0	16	-	-
60 MXL 025	60	6	AL	38.81	38.30	-	24	-	11.0	16	-	-
72 MXL 025	72	6	AL	46.57	46.06	-	25	-	11.0	16	-	-



同步带轮 Timing Belt pulleys

直孔(XL) Plain Bore(XL)

XL型齿形图: Tooth form diagram

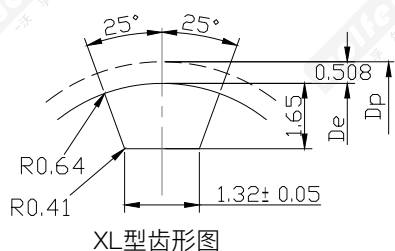

表示方法: Representation method

34-XL-037-6
 轮形代号Pulley code
 配带宽度代号0.37英寸
 Matching belt width
 code 0.37 inch
 型号,节距5.08
 Type,Pitch5.08
 齿数 NO.OF Grooves

XL 037 (5.08mm) for belt width 6.4 mm and 9.5mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
10 XL 037	10	6F	AL or steel	16.17	15.66	23	9.5	-	14.3	20	-	1
11 XL 037	11	6F	AL or steel	17.79	17.28	23	9.5	-	14.3	20	-	1
12 XL 037	12	6F	AL or steel	19.40	18.90	25	10.0	-	14.3	20	-	2
13 XL 037	13	6F	AL or steel	21.02	20.51	25	10.0	-	14.3	20	-	2
14 XL 037	14	6F	AL or steel	22.64	22.13	28	15.0	-	14.3	20	-	4
15 XL 037	15	6F	AL or steel	24.26	23.75	28	15.0	-	14.3	20	-	4
16 XL 037	16	6F	AL or steel	25.87	25.36	32	16.0	-	14.3	20	-	6
17 XL 037	17	6F	AL or steel	27.49	26.98	32	20.0	-	14.3	20	-	6
18 XL 037	18	6F	AL or steel	29.11	28.60	35	20.0	-	14.3	20	-	7
19 XL 037	19	6F	AL or steel	30.72	30.22	35	20.0	-	14.3	22	-	7
20 XL 037	20	6F	AL or steel	32.34	31.83	38	24.0	-	14.3	22	-	9
21 XL 037	21	6F	AL or steel	33.96	33.45	38	24.0	-	14.3	22	-	9
22 XL 037	22	6F	AL or steel	35.57	35.07	42	25.0	-	14.3	22	-	13
24 XL 037	24	6F	AL or steel	38.81	38.30	44	30.0	-	14.3	22	8	12
26 XL 037	26	6F	AL or steel	42.04	41.53	48	30.0	-	14.3	22	8	11
27 XL 037	27	6F	AL or steel	43.66	43.15	48	34.0	-	14.3	22	8	11
28 XL 037	28	6F	AL or steel	45.28	44.77	51	34.0	-	14.3	22	8	16
29 XL 037	29	6F	AL or steel	46.89	46.39	51	34.0	-	14.3	22	8	16
30 XL 037	30	6F	AL or steel	48.51	48.00	54	38.0	-	14.3	22	8	18
32 XL 037	32	6F	AL or steel	51.74	51.24	57	38.0	-	14.3	25	8	20
34 XL 037	34	6	AL or steel	54.98	54.47	-	45.0	-	14.3	25	8	-
35 XL 037	35	6	AL or steel	56.60	56.09	-	45.0	-	14.3	25	8	-
36 XL 037	36	6	AL or steel	58.21	57.70	-	45.0	-	14.3	25	8	-
38 XL 037	38	6	AL or steel	61.45	60.94	-	45.0	-	14.3	25	8	-
39 XL 037	39	6	AL or steel	63.06	62.56	-	45.0	-	14.3	25	8	-
40 XL 037	40	6	AL or steel	64.68	64.17	-	45.0	-	14.3	25	8	-
41 XL 037	41	6	AL or steel	66.30	65.79	-	45.0	-	14.3	25	8	-
42 XL 037	42	6	AL or steel	67.91	67.41	-	45.0	-	14.3	25	8	-
43 XL 037	43	6	AL or steel	69.53	69.02	-	45.0	-	14.3	25	8	-
44 XL 037	44	6	AL or steel	71.15	70.64	-	45.0	-	14.3	25	8	-




同步带轮 Timing Belt pulleys

直孔(XL) Plain Bore(XL)

XL型齿形图: Tooth form diagram

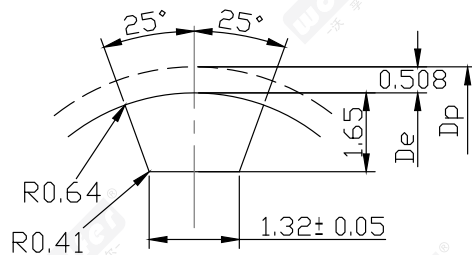

XL型齿形图

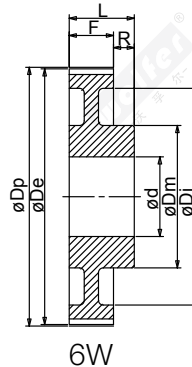

6W

表示方法: Representation method

56-XL-037-6W

轮形代号Pulley code

配带宽度代号0.37英寸

Matching belt width

code 0.37 inch

型号,节距5.08

Type,Pitch5.08

齿数 NO.OF Grooves

XL 037 (5.08mm) for belt width 6.4 mm and 9.5mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
45 XL 037	45	6W	AL or steel	72.77	72.26	-	45	61	14.3	25	10	-
46 XL 037	46	6W	AL or steel	74.38	73.87	-	45	61	14.3	25	10	-
47 XL 037	47	6W	AL or steel	76.00	75.49	-	45	61	14.3	25	10	-
48 XL 037	48	6W	AL or steel	77.62	77.11	-	45	61	14.3	25	10	-
49 XL 037	49	6W	AL or steel	79.23	78.73	-	45	61	14.3	25	10	-
52 XL 037	52	6W	AL or steel	84.08	83.58	-	45	67	14.3	25	10	-
56 XL 037	56	6W	AL or steel	90.55	90.04	-	45	80	14.3	25	10	-
57 XL 037	57	6W	AL or steel	92.17	91.66	-	45	80	14.3	25	10	-
58 XL 037	58	6W	AL or steel	93.79	93.28	-	45	80	14.3	25	10	-
59 XL 037	59	6W	AL or steel	95.40	94.90	-	45	80	14.3	25	10	-
60 XL 037	60	6W	AL or steel	97.02	96.51	-	45	80	14.3	25	10	-
68 XL 037	68	6W	AL or steel	109.96	109.45	-	45	100	14.3	25	10	-
69 XL 037	69	6W	AL or steel	111.57	111.07	-	45	100	14.3	25	10	-
70 XL 037	70	6W	AL or steel	113.19	112.68	-	45	100	14.3	25	10	-
71 XL 037	71	6W	AL or steel	114.81	114.30	-	45	100	14.3	25	10	-
72 XL 037	72	6W	AL or steel	116.42	115.92	-	45	100	14.3	25	10	-



同步带轮 Timing Belt pulleys

直孔(L) Plain Bore(L)

L型齿形图: Tooth form diagram

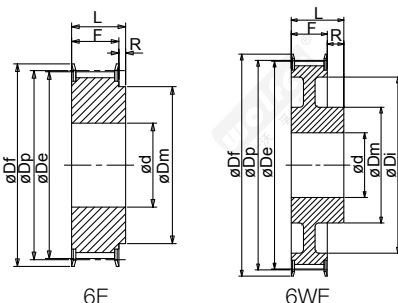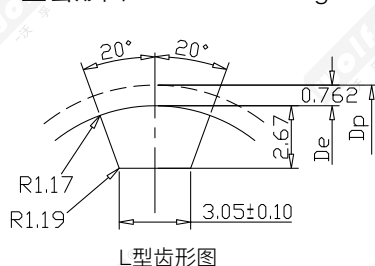

表示方法: Representation method

22-L-050-6F
 轮形代号Pulley code
 配带宽度代号0.5英寸
 Matching belt width
 code 0.5 inch
 型号,节距9.525
 Type,Pitch9.525
 齿数 NO.OF Grooves

L 050 (9.525mm) for belt width 12.7mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
10 L 050	10	6F	STEEL	30.32	29.56	37.0	20	-	19	28	8	50
11 L 050	11	6F	STEEL	33.35	32.59	37.0	22	-	19	30	8	50
12 L 050	12	6F	STEEL	36.38	35.62	43.0	24	-	19	30	8	52
13 L 050	13	6F	STEEL	39.41	38.65	44.0	28	-	19	30	8	83
14 L 050	14	6F	STEEL	42.45	41.68	48.0	28	-	19	30	8	54
15 L 050	15	6F	STEEL	45.48	44.72	51.0	34	-	19	30	8	55
16 L 050	16	6F	STEEL	48.51	47.75	54.0	36	-	19	32	8	56
17 L 050	17	6F	STEEL	51.54	50.78	57.0	36	-	19	32	10	57
18 L 050	18	6F	STEEL	54.57	53.81	60.0	40	-	19	32	10	58
19 L 050	19	6F	STEEL	57.61	56.84	64.0	40	-	19	32	10	59
20 L 050	20	6F	STEEL	60.64	59.88	66.0	40	-	19	32	10	60
21 L 050	21	6F	STEEL	63.67	62.91	70.0	45	-	19	32	10	61
22 L 050	22	6F	STEEL	66.70	65.94	75.0	45	-	19	32	10	62
23 L 050	23	6F	STEEL	69.73	68.97	79.0	55	-	19	32	10	63
24 L 050	24	6F	STEEL	72.77	72.00	79.0	55	-	19	32	10	63
25 L 050	25	6F	STEEL	75.80	75.04	82.5	58	-	19	32	10	64
26 L 050	26	6F	STEEL	78.83	78.07	86.0	58	-	19	32	11	65
27 L 050	27	6F	STEEL	81.86	81.10	86.0	58	-	19	32	11	65
28 L 050	28	6F	STEEL	84.89	84.13	91.0	58	-	19	32	11	66
29 L 050	29	6F	STEEL	87.93	87.16	94.0	58	-	19	32	11	67
30 L 050	30	6F	STEEL	90.96	90.20	97.0	70	-	19	32	11	68
32 L 050	32	6F	STEEL	97.02	96.26	102.0	70	-	19	32	11	70
33 L 050	33	6F	STEEL	100.05	99.29	106.0	70	-	19	32	11	71
34 L 050	34	6F	STEEL	103.08	102.32	112.0	70	-	19	32	11	72
35 L 050	35	6F	STEEL	106.12	105.35	112.0	70	-	19	32	11	72
36 L 050	36	6F	STEEL	109.15	108.39	115.0	70	-	19	32	11	74
40 L 050	40	6WF	STEEL	121.28	120.51	128.0	70	100	19	32	11	78
41 L 050	41	6WF	STEEL	124.31	123.55	135.0	70	103	19	32	11	80
42 L 050	42	6WF	STEEL	127.34	126.58	135.0	70	106	19	32	11	80
44 L 050	44	6WF	STEEL	133.40	132.64	142.0	70	112	19	32	11	81




同步带轮 Timing Belt pulleys

直孔(L) Plain Bore(L)


L型齿形图: Tooth form diagram

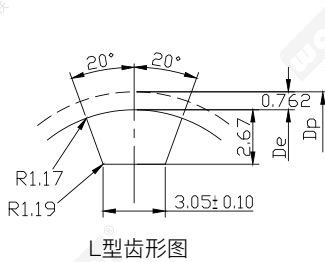


L型齿形图



6A



6W



6WF

表示方法: Representation method

48-L-050-6WF

轮形代号Pulley code
配带宽度代号0.5英寸
Matching belt width
code 0.5 inch
型号,节距9.525
Type,Pitch9.525
齿数 NO.OF Grooves

L 050 (9.525mm) for belt width 12.7 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
45 L 050	45	6WF	STEEL	136.44	135.67	142	70	115	19	32	11	81
47 L 050	47	6WF	STEEL	142.50	141.74	150	70	121	19	32	11	85
48 L 050	48	6WF	STEEL	145.53	144.77	150	70	124	19	32	11	85
49 L 050	49	6W	CAST IRON	148.56	147.80	-	70	127	19	32	14	-
50 L 050	50	6W	CAST IRON	151.60	150.83	-	70	130	19	32	14	-
52 L 050	52	6W	CAST IRON	157.66	156.90	-	70	136	19	32	14	-
56 L 050	56	6W	CAST IRON	169.79	169.02	-	70	149	19	32	14	-
57 L 050	57	6W	CAST IRON	172.82	172.06	-	70	152	19	32	14	-
60 L 050	60	6W	CAST IRON	181.91	181.15	-	75	160	19	42	14	-
65 L 050	65	6A	CAST IRON	197.07	196.31	-	75	176	19	42	14	-
66 L 050	66	6A	CAST IRON	200.11	199.34	-	75	179	19	42	14	-
72 L 050	72	6A	CAST IRON	218.30	217.53	-	75	197	19	42	14	-
84 L 050	84	6A	CAST IRON	254.68	253.92	-	75	233	19	42	14	-
90 L 050	90	6A	CAST IRON	272.87	272.11	-	75	252	19	42	14	-
96 L 050	96	6A	CAST IRON	291.06	290.30	-	75	269	19	42	14	-
120 L 050	120	6A	CAST IRON	363.83	363.07	-	75	342	19	42	14	-



同步带轮 Timing Belt pulleys

直孔(L) Plain Bore(L)

L型齿形图: Tooth form diagram

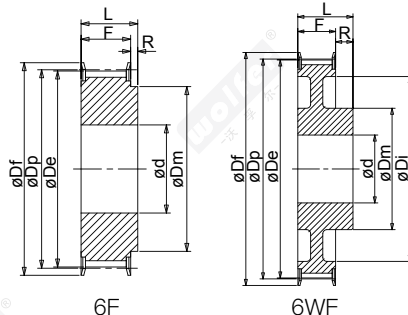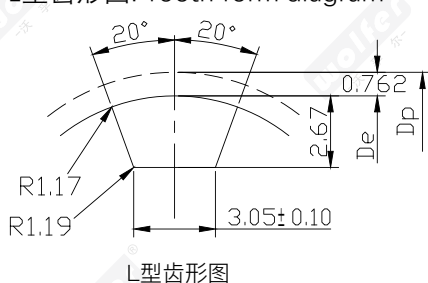

表示方法: Representation method

22-L-075-6F
 轮形代号 Pulley code
 配带宽度代号 0.75英寸
 Matching belt width
 code 0.75 inch
 型号, 节距 9.525
 Type, Pitch 9.525
 齿数 NO.OF Grooves

L 075 (9.525mm) for belt width 19.1 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
14 L 075	14	6F	STEEL	42.45	41.68	48.0	28	-	25.4	38	11	54
15 L 075	15	6F	STEEL	45.48	44.72	51.0	34	-	25.4	38	11	55
16 L 075	16	6F	STEEL	48.51	47.75	54.0	36	-	25.4	38	11	56
17 L 075	17	6F	STEEL	51.54	50.78	57.0	36	-	25.4	38	11	57
18 L 075	18	6F	STEEL	54.57	53.81	60.0	40	-	25.4	38	11	58
19 L 075	19	6F	STEEL	57.61	56.84	64.0	40	-	25.4	38	11	59
20 L 075	20	6F	STEEL	60.64	59.88	66.0	40	-	25.4	38	11	60
21 L 075	21	6F	STEEL	63.67	62.91	70.0	45	-	25.4	38	11	61
22 L 075	22	6F	STEEL	66.70	65.94	75.0	45	-	25.4	38	11	62
23 L 075	23	6F	STEEL	69.73	68.97	79.0	55	-	25.4	38	11	63
24 L 075	24	6F	STEEL	72.77	72.00	79.0	55	-	25.4	38	11	63
25 L 075	25	6F	STEEL	75.80	75.04	82.5	58	-	25.4	38	11	64
26 L 075	26	6F	STEEL	78.83	78.07	86.0	58	-	25.4	38	11	65
27 L 075	27	6F	STEEL	81.86	81.10	86.0	58	-	25.4	38	11	65
28 L 075	28	6F	STEEL	84.89	84.13	91.0	58	-	25.4	38	11	66
29 L 075	29	6F	STEEL	87.93	87.16	94.0	58	-	25.4	38	11	67
30 L 075	30	6F	STEEL	90.96	90.20	97.0	70	-	25.4	38	11	68
32 L 075	32	6F	STEEL	97.02	96.26	102.0	70	-	25.4	38	11	70
33 L 075	33	6F	STEEL	100.05	99.29	106.0	70	-	25.4	38	11	71
34 L 075	34	6F	STEEL	103.08	102.32	112.0	70	-	25.4	38	11	72
35 L 075	35	6F	STEEL	106.12	105.35	112.0	70	-	25.4	38	11	72
36 L 075	36	6F	STEEL	109.15	108.39	115.0	70	-	25.4	38	11	74
40 L 075	40	6WF	STEEL	121.28	120.51	128.0	70	100	25.4	38	11	78
41 L 075	41	6WF	STEEL	124.31	123.55	135.0	70	103	25.4	38	11	80
42 L 075	42	6WF	STEEL	127.34	126.58	135.0	70	106	25.4	38	11	80
44 L 075	44	6WF	STEEL	133.40	132.64	142.0	70	112	25.4	38	11	81
45 L 075	45	6WF	STEEL	136.44	135.67	142.0	70	115	25.4	38	11	81
47 L 075	47	6WF	STEEL	142.50	141.74	150.0	70	121	25.4	38	11	85
48 L 075	48	6WF	STEEL	145.53	144.77	150.0	70	124	25.4	38	11	85



同步带轮 Timing Belt pulleys

直孔(L) Plain Bore(L)

L型齿形图: Tooth form diagram

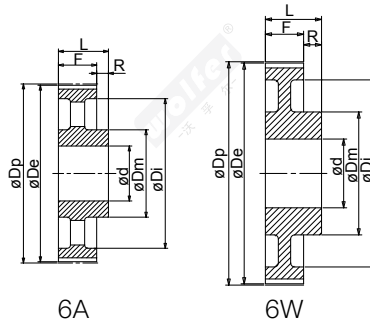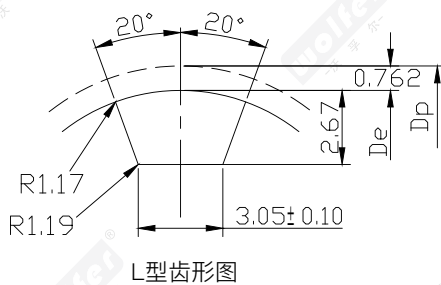

表示方法: Representation method

56-L-075-6W

轮形代号Pulley code
配带宽度代号0.75英寸
Matching belt width
code 0.75 inch
型号,节距9.525
Type,Pitch9.525
齿数 NO.OF Grooves



L 075 (9.525mm) for belt width 19.1 mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
49 L 075	49	6W	CAST IRON	148.56	147.80	-	70	127	25.4	38	14	-
50 L 075	50	6W	CAST IRON	151.60	150.83	-	70	130	25.4	38	14	-
52 L 075	52	6W	CAST IRON	157.66	156.90	-	70	136	25.4	38	14	-
56 L 075	56	6W	CAST IRON	169.79	169.02	-	70	149	25.4	38	14	-
57 L 075	57	6W	CAST IRON	172.82	172.06	-	70	152	25.4	38	14	-
60 L 075	60	6W	CAST IRON	181.91	181.15	-	75	160	25.4	45	14	-
65 L 075	65	6A	CAST IRON	197.07	196.31	-	75	176	25.4	45	14	-
66 L 075	66	6A	CAST IRON	200.11	199.34	-	75	179	25.4	45	14	-
72 L 075	72	6A	CAST IRON	218.30	217.53	-	75	197	25.4	45	14	-
84 L 075	84	6A	CAST IRON	254.68	253.92	-	75	233	25.4	45	14	-
90 L 075	90	6A	CAST IRON	272.87	272.11	-	75	252	25.4	45	14	-
96 L 075	96	6A	CAST IRON	291.06	290.30	-	75	269	25.4	45	14	-
120 L 075	120	6A	CAST IRON	363.83	363.07	-	75	342	25.4	45	14	-

同步带轮 Timing Belt pulleys

直孔(L) Plain Bore(L)

L型齿形图: Tooth form diagram

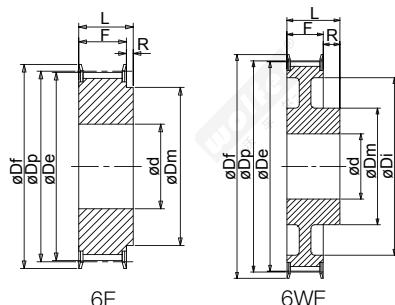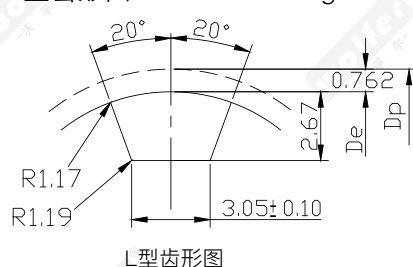

表示方法: Representation method

22-L-100-6F

轮形代号Pulley code

配带宽度代号1.0英寸

Matching belt width

code 1.0 inch

型号,节距9.525

Type,Pitch9.525

齿数 NO.OF Grooves

L 100 (9.525mm) for belt width 25.4 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
10 L 100	10	6F	STEEL	30.32	29.56	37	20	-	31.8	45	8	50
11 L 100	11	6F	STEEL	33.35	32.59	37	22	-	31.8	45	8	50
12 L 100	12	6F	STEEL	36.38	35.62	43	24	-	31.8	45	8	52
13 L 100	13	6F	STEEL	39.41	38.65	44	28	-	31.8	45	8	83
14 L 100	14	6F	STEEL	42.25	41.68	48	28	-	31.8	45	11	54
15 L 100	15	6F	STEEL	45.48	44.72	51	34	-	31.8	45	11	55
16 L 100	16	6F	STEEL	48.51	47.75	54	36	-	31.8	45	11	56
17 L 100	17	6F	STEEL	51.54	50.78	57	36	-	31.8	45	11	57
18 L 100	18	6F	STEEL	54.57	53.81	60	40	-	31.8	45	11	58
19 L 100	19	6F	STEEL	57.61	56.84	64	40	-	31.8	45	11	59
20 L 100	20	6F	STEEL	60.64	59.88	66	40	-	31.8	45	11	60
21 L 100	21	6F	STEEL	63.67	62.91	70	45	-	31.8	45	11	61
22 L 100	22	6F	STEEL	66.70	65.94	75	45	-	31.8	45	11	62
23 L 100	23	6F	STEEL	69.73	68.97	79	55	-	31.8	45	11	63
24 L 100	24	6F	STEEL	72.77	72.00	79	55	-	31.8	45	11	63
25 L 100	25	6F	STEEL	75.80	75.04	83	58	-	31.8	45	11	64
26 L 100	26	6F	STEEL	78.83	78.07	87	58	-	31.8	45	11	65
27 L 100	27	6F	STEEL	81.86	81.10	87	58	-	31.8	45	11	65
28 L 100	28	6F	STEEL	84.89	84.13	91	58	-	31.8	45	11	66
29 L 100	29	6F	STEEL	87.93	87.16	94	58	-	31.8	45	11	67
30 L 100	30	6F	STEEL	90.96	90.20	97	70	-	31.8	45	11	68
32 L 100	32	6F	STEEL	97.02	96.26	102	70	-	31.8	45	11	70
33 L 100	33	6F	STEEL	100.05	99.29	106	70	-	31.8	45	11	71
34 L 100	34	6F	STEEL	103.08	102.32	112	70	-	31.8	45	11	72
35 L 100	35	6F	STEEL	106.12	105.35	112	70	-	31.8	45	11	72
36 L 100	36	6F	STEEL	109.15	108.39	115	70	-	31.8	45	11	74
40 L 100	40	6WF	STEEL	121.28	120.51	128	70	100	31.8	45	11	78
41 L 100	41	6WF	STEEL	124.31	123.55	135	70	103	31.8	45	11	80
42 L 100	42	6WF	STEEL	127.34	126.58	135	70	106	31.8	45	11	80
44 L 100	44	6WF	STEEL	133.40	132.64	142	70	112	31.8	45	11	81




同步带轮 Timing Belt pulleys

直孔(L) Plain Bore(L)


L型齿形图: Tooth form diagram

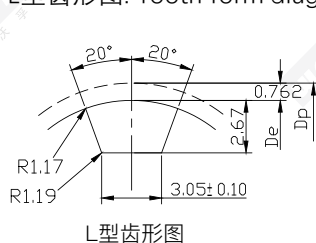

6A



6W



6WF

表示方法: Representation method

56-L-100-6W

轮形代号Pulley code
配带宽度代号1.0英寸
Matching belt width
code 1.0 inch
型号,节距9.525
Type,Pitch9.525
齿数 NO.OF Grooves

L 100(9.525mm) for belt width 25.4 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
45 L 100	45	6WF	STEEL	136.44	135.67	142	70	115	31.8	45	11	81
47 L 100	47	6WF	STEEL	142.50	141.74	150	70	121	31.8	45	11	85
48 L 100	48	6WF	STEEL	145.53	144.77	150	70	124	31.8	45	11	85
49 L 100	49	6W	CAST IRON	148.56	147.80	-	70	127	31.8	45	14	-
50 L 100	50	6W	CAST IRON	151.60	150.83	-	70	130	31.8	45	14	-
52 L 100	52	6W	CAST IRON	157.66	156.90	-	70	136	31.8	45	14	-
56 L 100	56	6W	CAST IRON	169.79	169.02	-	70	149	31.8	45	14	-
57 L 100	57	6W	CAST IRON	172.82	172.06	-	70	152	31.8	45	14	-
60 L 100	60	6W	CAST IRON	181.91	181.15	-	75	160	31.8	50	14	-
65 L 100	65	6A	CAST IRON	197.07	196.31	-	75	176	31.8	50	14	-
66 L 100	66	6A	CAST IRON	200.11	199.34	-	75	179	31.8	50	14	-
72 L 100	72	6A	CAST IRON	218.30	217.53	-	75	197	31.8	50	14	-
84 L 100	84	6A	CAST IRON	254.68	253.92	-	75	233	31.8	50	14	-
90 L 100	90	6A	CAST IRON	272.87	272.11	-	75	252	31.8	50	14	-
96 L 100	96	6A	CAST IRON	291.06	290.30	-	75	269	31.8	50	14	-
120 L 100	120	6A	CAST IRON	363.83	363.07	-	75	342	31.8	50	14	-



同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

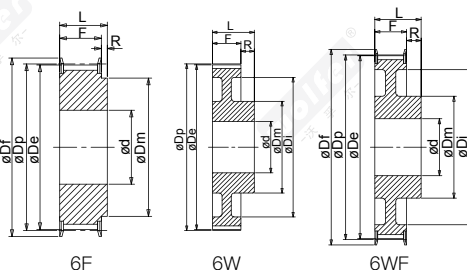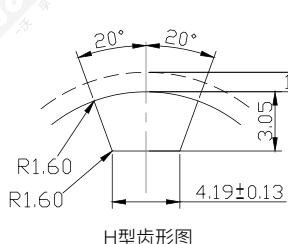

表示方法: Representation method

22-H-075-6F
 轮形代号 Pulley code
 配带宽度代号 0.75 英寸
 Matching belt width
 code 0.75 inch
 型号, 节距 12.7
 Type, Pitch 12.7
 齿数 NO.OF Grooves

H 075 (12.7mm) for belt width 19.1 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
14 H 075	14	6F	STEEL	56.60	55.22	64.0	40	-	26.4	40	8	59
15 H 075	15	6F	STEEL	60.64	59.27	66.5	45	-	26.4	40	8	60
16 H 075	16	6F	STEEL	64.68	63.31	70.0	45	-	26.4	40	8	61
17 H 075	17	6F	STEEL	68.72	67.35	75.0	45	-	26.4	40	8	62
18 H 075	18	6F	STEEL	72.77	71.39	79.0	55	-	26.4	40	11	63
19 H 075	19	6F	STEEL	76.81	75.44	82.5	60	-	26.4	40	11	64
20 H 075	20	6F	STEEL	80.85	79.48	87.0	62	-	26.4	40	11	76
21 H 075	21	6F	STEEL	84.89	83.52	91.0	65	-	26.4	40	11	66
22 H 075	22	6F	STEEL	88.94	87.56	94.0	68	-	26.4	40	11	67
23 H 075	23	6F	STEEL	92.98	91.61	97.0	72	-	26.4	40	11	68
24 H 075	24	6F	STEEL	97.02	95.65	102.0	72	-	26.4	40	11	70
25 H 075	25	6F	STEEL	101.06	99.69	106.0	72	-	26.4	40	11	71
26 H 075	26	6F	STEEL	105.11	103.73	112.0	80	-	26.4	40	11	72
27 H 075	27	6F	STEEL	109.15	107.78	115.0	80	-	26.4	40	11	74
28 H 075	28	6F	STEEL	113.19	111.82	120.0	80	-	26.4	40	11	75
29 H 075	29	6F	STEEL	117.23	115.86	120.0	80	-	26.4	40	11	75
30 H 075	30	6F	STEEL	121.28	119.90	128.0	80	-	26.4	40	11	78
32 H 075	32	6F	STEEL	129.36	127.99	135.0	80	-	26.4	40	11	80
33 H 075	33	6F	STEEL	133.40	132.03	142.0	80	-	26.4	40	11	81
34 H 075	34	6F	STEEL	137.45	136.07	142.0	80	-	26.4	40	11	81
35 H 075	35	6F	STEEL	141.49	140.12	150.0	80	-	26.4	40	11	85
36 H 075	36	6F	STEEL	145.53	144.16	150.0	80	-	26.4	40	11	85
38 H 075	38	6F	STEEL	153.62	152.24	158.0	80	-	26.4	40	11	86
40 H 075	40	6F	STEEL	161.70	160.33	168.0	80	-	26.4	40	11	90
42 H 075	42	6F	STEEL	169.79	168.41	180.0	80	-	26.4	40	11	94
44 H 075	44	6WF	CAST IRON	177.87	176.50	184.0	80	150	26.4	40	14	95
45 H 075	45	6WF	CAST IRON	181.91	180.54	192.0	80	154	26.4	40	14	96
48 H 075	48	6WF	CAST IRON	194.04	192.67	200.0	90	166	26.4	45	14	100
49 H 075	49	6W	CAST IRON	198.08	196.71	-	90	170	26.4	45	14	-
50 H 075	50	6W	CAST IRON	202.13	200.75	-	90	174	26.4	45	14	-



同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

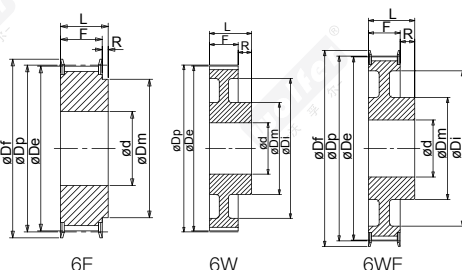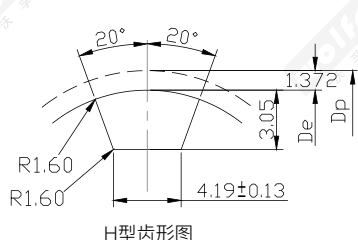

表示方法: Representation method

42-H-100-6WF

轮形代号Pulley code

配带宽度代号1.0英寸

Matching belt width

code 1.0 inch

型号,节距12.7

Type,Pitch12.7

齿数 NO.OF Grooves



H 100 (12.700mm) for belt width 25.4 mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
14 H 100	14	6F	STEEL	56.60	55.22	64.0	40	-	31.8	45	11	59
15 H 100	15	6F	STEEL	60.64	59.27	66.5	45	-	31.8	45	11	60
16 H 100	16	6F	STEEL	64.68	63.31	70.0	45	-	31.8	45	11	61
17 H 100	17	6F	STEEL	68.72	67.35	75.0	45	-	31.8	45	11	62
18 H 100	18	6F	STEEL	72.77	71.39	79.0	55	-	31.8	45	14	63
19 H 100	19	6F	STEEL	76.81	75.44	82.5	60	-	31.8	45	14	64
20 H 100	20	6F	STEEL	80.85	79.48	87.0	62	-	31.8	45	14	76
21 H 100	21	6F	STEEL	84.89	83.52	91.0	65	-	31.8	45	14	66
22 H 100	22	6F	STEEL	88.94	87.56	94.0	68	-	31.8	45	14	67
23 H 100	23	6F	STEEL	92.98	91.61	97.0	72	-	31.8	45	14	68
24 H 100	24	6F	STEEL	97.02	95.65	102.0	72	-	31.8	45	14	70
25 H 100	25	6F	STEEL	101.06	99.69	106.0	72	-	31.8	45	14	71
26 H 100	26	6F	STEEL	105.11	103.73	112.0	80	-	31.8	45	14	72
27 H 100	27	6F	STEEL	109.15	107.78	115.0	80	-	31.8	45	14	74
28 H 100	28	6F	STEEL	113.19	111.82	120.0	80	-	31.8	45	14	75
29 H 100	29	6F	STEEL	117.23	115.86	120.0	80	-	31.8	45	14	75
30 H 100	30	6F	STEEL	121.28	119.90	128.0	80	-	31.8	45	14	78
32 H 100	32	6F	STEEL	129.36	127.99	135.0	80	-	31.8	45	14	80
33 H 100	33	6F	STEEL	133.40	132.03	142.0	80	-	31.8	45	14	81
34 H 100	34	6F	STEEL	137.45	136.07	142.0	80	-	31.8	45	14	81
35 H 100	35	6F	STEEL	141.49	140.12	150.0	80	-	31.8	45	14	85
36 H 100	36	6WF	STEEL	145.53	144.16	150.0	80	118	31.8	45	14	85
38 H 100	38	6WF	STEEL	153.62	152.24	158.0	80	123	31.8	45	14	86
40 H 100	40	6WF	STEEL	161.70	160.33	168.0	80	134	31.8	45	14	90
42 H 100	42	6WF	STEEL	169.79	168.41	180.0	80	140	31.8	45	14	94
44 H 100	44	6WF	CAST IRON	177.87	176.50	184.0	80	150	31.8	50	14	95
45 H 100	45	6WF	CAST IRON	181.91	180.54	192.0	80	154	31.8	50	14	96
48 H 100	48	6WF	CAST IRON	194.04	192.67	200.0	90	166	31.8	50	14	100
49 H 100	49	6W	CAST IRON	198.08	196.71	-	90	170	31.8	50	19	-
50 H 100	50	6W	CAST IRON	202.13	200.75	-	90	174	31.8	50	19	-
52 H 100	52	6W	CAST IRON	210.21	208.84	-	90	182	31.8	50	19	-

同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

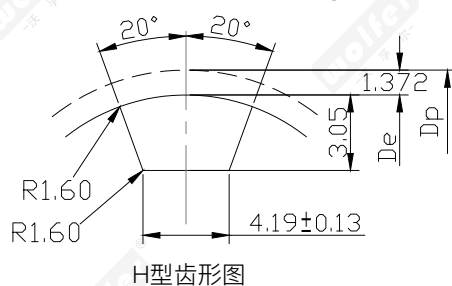

6A

表示方法: Representation method

72-H-100-6A

- └ 轮形代号Pulley code
- └ 配带宽度代号1.0英寸
Matching belt width
code 1.0 inch
- └ 型号,节距12.7
Type,Pitch12.7
- └ 齿数 NO.OF Grooves

H 100 (12.700mm) for belt width 25.4 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
58 H 100	58	6A	CAST IRON	234.47	233.09	-	90	207	31.8	50	19	-
60 H 100	60	6A	CAST IRON	242.55	241.18	-	90	215	31.8	50	19	-
70 H 100	70	6A	CAST IRON	282.98	281.61	-	100	255	31.8	55	19	-
72 H 100	72	6A	CAST IRON	291.06	289.69	-	100	263	31.8	55	19	-
82 H 100	82	6A	CAST IRON	331.49	330.12	-	100	304	31.8	55	19	-
84 H 100	84	6A	CAST IRON	339.57	338.20	-	100	312	31.8	55	19	-
94 H 100	94	6A	CAST IRON	380.00	378.63	-	120	352	31.8	60	19	-
96 H 100	96	6A	CAST IRON	388.08	386.71	-	120	360	31.8	60	19	-
106 H 100	106	6A	CAST IRON	428.51	427.14	-	120	401	31.8	60	19	-
116 H 100	116	6A	CAST IRON	468.93	467.56	-	120	441	31.8	60	19	-
118 H 100	118	6A	CAST IRON	477.02	475.65	-	120	449	31.8	60	19	-
120 H 100	120	6A	CAST IRON	485.10	483.73	-	120	458	31.8	60	19	-
150 H 100	150	6A	CAST IRON	606.38	605.01	-	120	579	31.8	60	19	-
152 H 100	152	6A	CAST IRON	614.47	613.09	-	120	587	31.8	60	19	-
154 H 100	154	6A	CAST IRON	622.55	621.18	-	120	595	31.8	60	19	-
156 H 100	156	6A	CAST IRON	630.64	629.26	-	120	603	31.8	60	19	-



同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

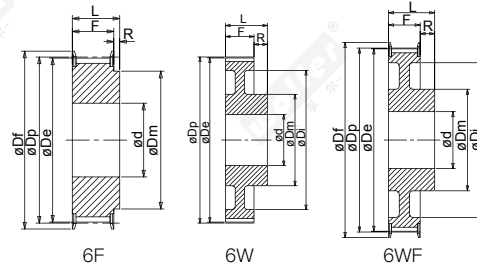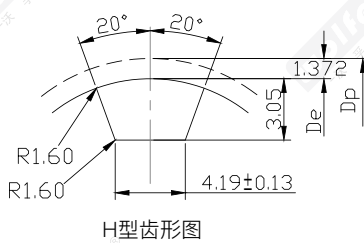

表示方法: Representation method

42-H-150-6WF

轮形代号Pulley code
配带宽度代号1.5英寸
Matching belt width
code 1.5 inch
型号,节距12.7
Type,Pitch 12.7
齿数 NO.OF Grooves



H 150 (12.700mm) for belt width 38.1 mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
14 H 150	14	6F	STEEL	56.60	55.22	64.0	40	-	46	58	11	59
15 H 150	15	6F	STEEL	60.64	59.27	66.5	45	-	46	58	11	60
16 H 150	16	6F	STEEL	64.68	63.31	70.0	45	-	46	58	11	61
17 H 150	17	6F	STEEL	68.72	67.35	75.0	45	-	46	58	11	62
18 H 150	18	6F	STEEL	72.77	71.39	79.0	55	-	46	58	14	63
19 H 150	19	6F	STEEL	76.81	75.44	82.5	60	-	46	58	14	64
20 H 150	20	6F	STEEL	80.85	79.48	87.0	62	-	46	58	14	76
21 H 150	21	6F	STEEL	84.89	83.52	91.0	65	-	46	58	14	66
22 H 150	22	6F	STEEL	88.94	87.56	94.0	68	-	46	58	14	67
23 H 150	23	6F	STEEL	92.98	91.61	97.0	72	-	46	58	14	68
24 H 150	24	6F	STEEL	97.02	95.65	102.0	72	-	46	58	14	70
25 H 150	25	6F	STEEL	101.06	99.69	106.0	72	-	46	58	14	71
26 H 150	26	6F	STEEL	105.11	103.73	112.0	80	-	46	58	14	72
27 H 150	27	6F	STEEL	109.15	107.78	115.0	80	-	46	58	14	74
28 H 150	28	6F	STEEL	113.19	111.82	120.0	80	-	46	58	14	75
29 H 150	29	6F	STEEL	117.23	115.86	120.0	80	-	46	58	14	75
30 H 150	30	6F	STEEL	121.28	119.90	128.0	80	-	46	58	14	78
32 H 150	32	6F	STEEL	129.36	127.99	135.0	80	-	46	58	14	80
33 H 150	33	6F	STEEL	133.40	132.03	142.0	80	-	46	58	14	81
34 H 150	34	6F	STEEL	137.45	136.07	142.0	80	-	46	58	14	81
35 H 150	35	6F	STEEL	141.49	140.12	150.0	80	-	46	58	14	85
36 H 150	36	6WF	STEEL	145.53	144.16	150.0	80	118	46	58	14	85
38 H 150	38	6WF	STEEL	153.62	152.24	158.0	80	126	46	58	14	86
40 H 150	40	6WF	STEEL	161.70	160.33	168.0	80	134	46	58	14	90
42 H 150	42	6WF	STEEL	169.79	168.41	180.0	80	140	46	58	19	94
44 H 150	44	6WF	CAST IRON	177.87	176.50	184.0	80	150	46	58	19	95
45 H 150	45	6WF	CAST IRON	181.91	180.54	192.0	80	154	46	58	19	97
48 H 150	48	6WF	CAST IRON	194.04	192.67	200.0	90	166	46	65	19	100
49 H 150	49	6W	CAST IRON	198.08	196.71	-	90	170	46	65	19	-
50 H 150	50	6W	CAST IRON	202.13	200.75	-	90	174	46	65	19	-
52 H 150	52	6W	CAST IRON	210.21	208.84	-	90	182	46	65	19	-

同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

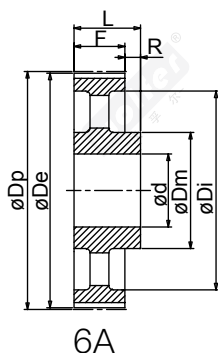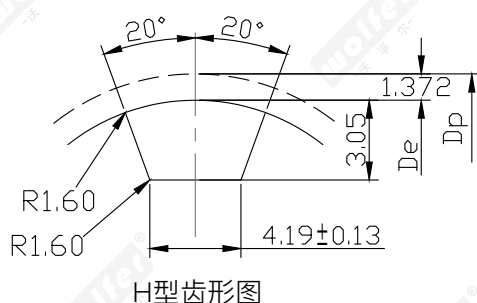

表示方法: Representation method

72-H-150-6A

- 轮形代号Pulley code
- 配带宽度代号1.5英寸
Matching belt width
code 1.5 inch
- 型号,节距12.7
Type,Pitch12.7
- 齿数 NO.OF Grooves

H 150 (12.700mm) for belt width 38.1 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
58 H 150	58	6A	CAST IRON	234.47	233.09	-	90	207	46	65	19	-
60 H 150	60	6A	CAST IRON	242.55	241.18	-	90	215	46	65	19	-
70 H 150	70	6A	CAST IRON	282.98	281.61	-	100	255	46	65	24	-
72 H 150	72	6A	CAST IRON	291.06	289.69	-	100	263	46	65	24	-
82 H 150	82	6A	CAST IRON	331.49	330.12	-	100	304	46	65	24	-
84 H 150	84	6A	CAST IRON	339.57	338.20	-	100	312	46	65	24	-
94 H 150	94	6A	CAST IRON	380.00	378.63	-	120	352	46	65	24	-
96 H 150	96	6A	CAST IRON	388.08	386.71	-	120	360	46	65	24	-
106 H 150	106	6A	CAST IRON	428.51	427.14	-	120	401	46	65	24	-
116 H 150	116	6A	CAST IRON	468.93	467.56	-	120	441	46	65	24	-
118 H 150	118	6A	CAST IRON	477.02	475.65	-	120	449	46	65	24	-
120 H 150	120	6A	CAST IRON	485.10	483.73	-	120	458	46	65	24	-
150 H 150	150	6A	CAST IRON	606.38	605.01	-	120	579	46	65	24	-
152 H 150	152	6A	CAST IRON	614.47	613.09	-	120	587	46	65	24	-
154 H 150	154	6A	CAST IRON	622.55	621.18	-	120	595	46	65	24	-
156 H 150	156	6A	CAST IRON	630.64	629.26	-	120	603	46	65	24	-



同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

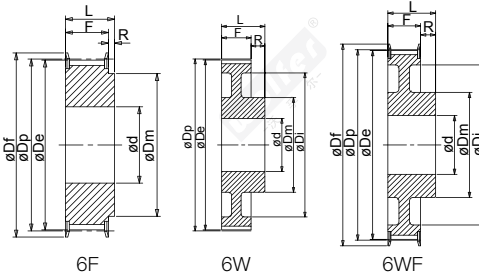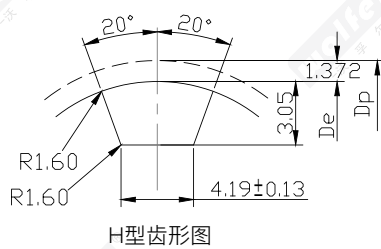

表示方法: Representation method

42-H-200-6WF

轮形代号Pulley code
配带宽度代号2.0英寸
Matching belt width
code 2.0 inch
型号,节距12.7
Type,Pitch12.7
齿数 NO.OF Grooves



H 200 (12.700mm) for belt width 50.8 mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
14 H 200	14	6F	STEEL	56.60	55.22	64.0	40	-	58.7	70	11	59
15 H 200	15	6F	STEEL	60.64	59.27	66.5	45	-	58.7	70	11	60
16 H 200	16	6F	STEEL	64.68	63.31	70.0	45	-	58.7	70	11	61
17 H 200	17	6F	STEEL	68.72	67.35	75.0	45	-	58.7	70	11	62
18 H 200	18	6F	STEEL	72.77	71.39	79.0	55	-	58.7	70	14	63
19 H 200	19	6F	STEEL	76.81	75.44	82.5	60	-	58.7	70	14	64
20 H 200	20	6F	STEEL	80.85	79.48	87.0	62	-	58.7	70	14	76
21 H 200	21	6F	STEEL	84.89	83.52	91.0	65	-	58.7	70	14	66
22 H 200	22	6F	STEEL	88.94	87.56	94.0	68	-	58.7	70	14	67
23 H 200	23	6F	STEEL	92.98	91.61	97.0	72	-	58.7	70	14	68
24 H 200	24	6F	STEEL	97.02	95.65	102.0	72	-	58.7	70	14	70
25 H 200	25	6F	STEEL	101.06	99.69	106.0	72	-	58.7	70	14	71
26 H 200	26	6F	STEEL	105.11	103.73	112.0	80	-	58.7	70	14	72
27 H 200	27	6F	STEEL	109.15	107.78	115.0	80	-	58.7	70	14	74
28 H 200	28	6F	STEEL	113.19	111.82	120.0	80	-	58.7	70	14	75
29 H 200	29	6F	STEEL	117.23	115.86	120.0	80	-	58.7	70	14	75
30 H 200	30	6F	STEEL	121.28	119.90	128.0	80	-	58.7	70	14	78
32 H 200	32	6F	STEEL	129.36	127.99	135.0	80	-	58.7	70	14	80
33 H 200	33	6F	STEEL	133.40	132.03	142.0	80	-	58.7	70	14	81
34 H 200	34	6F	STEEL	137.45	136.07	142.0	80	-	58.7	70	14	81
35 H 200	35	6F	STEEL	141.49	140.12	150.0	80	-	58.7	70	14	85
36 H 200	36	6WF	STEEL	145.53	144.16	150.0	80	118	58.7	70	14	85
38 H 200	38	6WF	STEEL	153.62	152.24	158.0	80	126	58.7	70	14	86
40 H 200	40	6WF	STEEL	161.70	160.33	168.0	80	134	58.7	70	14	90
42 H 200	42	6WF	STEEL	169.79	168.41	180.0	80	140	58.7	70	19	94
44 H 200	44	6WF	CAST IRON	177.87	176.50	184.0	80	150	58.7	70	19	95
45 H 200	45	6WF	CAST IRON	181.91	180.54	192.0	80	154	58.7	70	19	96
48 H 200	48	6WF	CAST IRON	194.04	192.67	200.0	90	166	58.7	75	24	100
49 H 200	49	6W	CAST IRON	198.08	196.71	-	90	170	58.7	75	24	-
50 H 200	50	6W	CAST IRON	202.13	200.75	-	90	174	58.7	75	24	-

同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

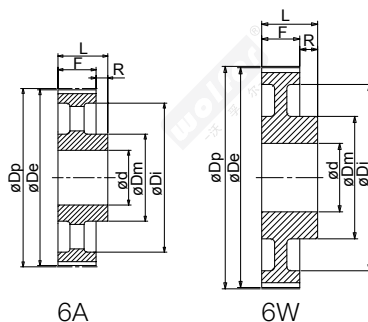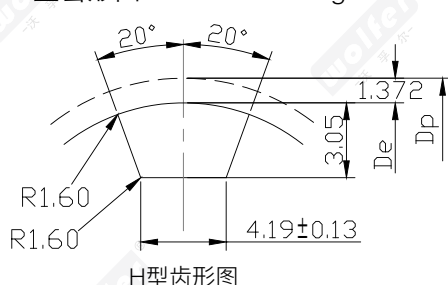

表示方法: Representation method

72-H-200-6A

- 轮形代号Pulley code
- 配带宽度代号2.0英寸
Matching belt width
code 2.0 inch
- 型号,节距12.7
Type,Pitch12.7
- 齿数 NO.OF Grooves

H 200 (12.700mm) for belt width 50.8 mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
52 H 200	52	6W	CAST IRON	210.21	208.84	-	90	182	58.7	75	24	-
58 H 200	58	6A	CAST IRON	234.47	233.09	-	90	207	58.7	75	24	-
60 H 200	60	6A	CAST IRON	242.55	241.18	-	90	215	58.7	75	24	-
70 H 200	70	6A	CAST IRON	282.98	281.61	-	100	255	58.7	75	28	-
72 H 200	72	6A	CAST IRON	291.06	289.69	-	100	263	58.7	75	28	-
82 H 200	82	6A	CAST IRON	331.49	330.12	-	100	304	58.7	75	28	-
84 H 200	84	6A	CAST IRON	339.57	338.20	-	100	312	58.7	75	28	-
94 H 200	94	6A	CAST IRON	380.00	378.63	-	120	352	58.7	75	28	-
96 H 200	96	6A	CAST IRON	388.08	386.71	-	120	360	58.7	75	28	-
106 H 200	106	6A	CAST IRON	428.51	427.14	-	120	401	58.7	75	28	-
116 H 200	116	6A	CAST IRON	468.93	467.56	-	120	441	58.7	75	28	-
118 H 200	118	6A	CAST IRON	477.02	475.65	-	120	449	58.7	75	28	-
120 H 200	120	6A	CAST IRON	485.10	483.73	-	120	458	58.7	75	28	-
150 H 200	150	6A	CAST IRON	606.38	605.01	-	120	579	58.7	75	28	-
152 H 200	152	6A	CAST IRON	614.47	613.09	-	120	587	58.7	75	28	-
154 H 200	154	6A	CAST IRON	622.55	621.18	-	120	595	58.7	75	28	-
156 H 200	156	6A	CAST IRON	630.64	629.26	-	120	603	58.7	75	28	-



同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

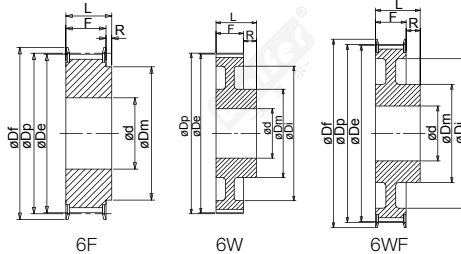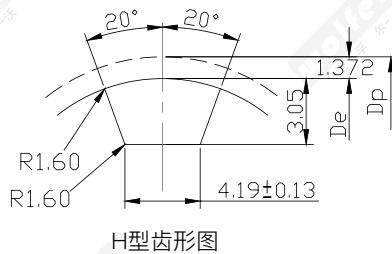

表示方法: Representation method

42-H-300-6WF

轮形代号Pulley code
配带宽度代号3.0英寸
Matching belt width
code 3.0 inch
型号,节距12.7
Type,Pitch12.7
齿数 NO.OF Grooves


H 300 (12.700mm) for belt width 76.2 mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
14 H 300	14	6F	STEEL	56.60	55.22	64.0	40	-	85.7	100	11	59
15 H 300	15	6F	STEEL	60.64	59.27	66.5	45	-	85.7	100	11	60
16 H 300	16	6F	STEEL	64.68	63.31	70.0	45	-	85.7	100	11	61
17 H 300	17	6F	STEEL	68.72	67.35	75.0	45	-	85.7	100	11	62
18 H 300	18	6F	STEEL	72.77	71.39	79.0	55	-	85.7	100	19	63
19 H 300	19	6F	STEEL	76.81	75.44	82.5	60	-	85.7	100	19	64
20 H 300	20	6F	STEEL	80.85	79.48	87.0	62	-	85.7	100	19	76
21 H 300	21	6F	STEEL	84.89	83.52	91.0	65	-	85.7	100	19	66
22 H 300	22	6F	STEEL	88.94	87.56	94.0	68	-	85.7	100	19	67
23 H 300	23	6F	STEEL	92.98	91.61	97.0	72	-	85.7	100	19	68
24 H 300	24	6F	STEEL	97.02	95.65	102.0	72	-	85.7	100	19	70
25 H 300	25	6F	STEEL	101.06	99.69	106.0	72	-	85.7	100	19	71
26 H 300	26	6F	STEEL	105.11	103.73	112.0	80	-	85.7	100	19	72
27 H 300	27	6F	STEEL	109.15	107.78	115.0	80	-	85.7	100	19	74
28 H 300	28	6F	STEEL	113.19	111.82	120.0	80	-	85.7	100	19	75
29 H 300	29	6F	STEEL	117.23	115.86	120.0	80	-	85.7	100	19	75
30 H 300	30	6F	STEEL	121.28	119.90	128.0	80	-	85.7	100	19	78
32 H 300	32	6F	STEEL	129.36	127.99	135.0	80	-	85.7	100	19	80
33 H 300	33	6F	STEEL	133.40	132.03	142.0	80	-	85.7	100	19	81
34 H 300	34	6F	STEEL	137.45	136.07	142.0	80	-	85.7	100	19	81
35 H 300	35	6F	STEEL	141.49	140.12	150.0	80	-	85.7	100	19	85
36 H 300	36	6WF	STEEL	145.53	144.16	150.0	80	118	85.7	100	19	85
38 H 300	38	6WF	STEEL	153.62	152.24	158.0	80	126	85.7	100	19	86
40 H 300	40	6WF	STEEL	161.70	160.33	168.0	80	134	85.7	100	19	90
42 H 300	42	6WF	STEEL	169.79	168.41	180.0	80	140	85.7	100	24	94
44 H 300	44	6WF	CAST IRON	177.87	176.50	184.0	80	150	85.7	100	24	95
45 H 300	45	6WF	CAST IRON	181.91	180.54	192.0	80	154	85.7	100	24	96
48 H 300	48	6WF	CAST IRON	194.04	192.67	200.0	90	166	85.7	100	24	100
49 H 300	49	6W	CAST IRON	198.08	196.71	-	90	170	85.7	100	24	-
50 H 300	50	6W	CAST IRON	202.13	200.75	-	90	174	85.7	100	24	-
52 H 300	52	6W	CAST IRON	210.21	208.84	-	90	182	85.7	100	24	-
58 H 300	58	6A	CAST IRON	234.47	233.09	-	90	207	85.7	100	24	-


同步带轮 Timing Belt pulleys

直孔(H) Plain Bore(H)

H型齿形图: Tooth form diagram

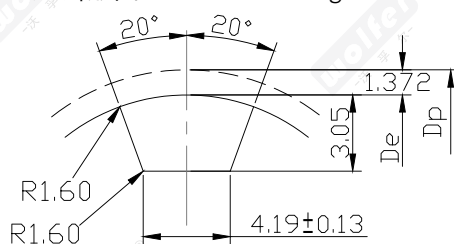

H型齿形图



6A

表示方法: Representation method

72-H-300-6A

- 轮形代号Pulley code
- 配带宽度代号3.0英寸
Matching belt width
code 3.0 inch
- 型号,节距12.7
Type, Pitch 12.7
- 齿数 NO.OF Grooves

H 300 (12.700mm) for belt width 76.2 mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
60 H 300	60	6A	CAST IRON	242.55	241.18	-	90	215	85.7	100	28	-
70 H 300	70	6A	CAST IRON	282.98	281.61	-	100	255	85.7	100	28	-
72 H 300	72	6A	CAST IRON	291.06	289.69	-	100	263	85.7	100	28	-
82 H 300	82	6A	CAST IRON	331.49	330.12	-	100	304	85.7	100	28	-
84 H 300	84	6A	CAST IRON	339.57	338.20	-	100	312	85.7	100	28	-
94 H 300	94	6A	CAST IRON	380.00	378.63	-	120	352	85.7	100	28	-
96 H 300	96	6A	CAST IRON	388.08	386.71	-	120	360	85.7	100	28	-
106 H 300	106	6A	CAST IRON	428.51	427.14	-	120	401	85.7	100	28	-
116 H 300	116	6A	CAST IRON	468.93	467.56	-	120	441	85.7	100	28	-
118 H 300	118	6A	CAST IRON	477.02	475.65	-	120	449	85.7	100	28	-
120 H 300	120	6A	CAST IRON	485.10	483.73	-	120	458	85.7	100	28	-
150 H 300	150	6A	CAST IRON	606.38	605.01	-	120	579	85.7	100	28	-
152 H 300	152	6A	CAST IRON	614.47	613.09	-	120	587	85.7	100	28	-
154 H 300	154	6A	CAST IRON	622.55	621.18	-	120	595	85.7	100	28	-
156 H 300	156	6A	CAST IRON	630.64	629.26	-	120	603	85.7	100	28	-