

同步带轮 Timing Belt pulleys



同步带轮 Timing Belt Pulleys

直孔 (HTD)
Plain Bore (HTD)





同步带轮 Timing Belt pulleys


直孔(HTD) Plain Bore(HTD)

3M齿形图


Tooth form diagram



1F



6



6F

表示方法:

Representation method

10-3M-09-1F

- 轮形代号 Pulley code
- 配带宽度代号 9mm
- Matching belt width code
- 9mm
- 型号, 节距 3mm Type, Pitch
- 齿数 NO.OF Grooves

HTD 3M-06 For belt width 06mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
10-3M-06	10	1F	AL	9.55	8.79	13.0	13.0	-	7.2	14.5	-	501
12-3M-06	12	1F	AL	11.46	10.70	15.0	15.0	-	7.2	14.5	-	502
14-3M-06	14	1F	AL	13.37	12.61	16.0	16.0	-	7.2	14.5	-	503
15-3M-06	15	1F	AL	14.32	13.56	17.5	17.5	-	7.2	14.5	-	516
16-3M-06	16	6F	AL	15.28	14.52	17.5	10.0	-	9.8	17.5	-	504
18-3M-06	18	6F	AL	17.19	16.43	20.0	11.0	-	9.8	17.5	-	505
20-3M-06	20	6F	AL	19.10	18.34	23.0	13.0	-	9.8	17.5	-	517
21-3M-06	21	6F	AL	20.05	19.29	25.0	13.0	-	9.8	17.5	-	518
22-3M-06	22	6F	AL	21.01	20.25	25.0	13.0	-	9.8	17.5	-	518
24-3M-06	24	6F	AL	22.92	22.16	25.0	13.0	-	9.8	17.5	-	518
26-3M-06	26	6F	AL	24.83	24.07	28.0	16.0	-	9.8	17.5	-	508
28-3M-06	28	6F	AL	26.74	25.98	32.0	18.0	-	9.8	17.5	-	509
30-3M-06	30	6F	AL	28.65	27.89	32.0	20.0	-	9.8	17.5	-	509
32-3M-06	32	6F	AL	30.56	29.80	36.0	22.0	-	9.8	17.5	-	510
36-3M-06	36	6F	AL	34.38	33.62	39.0	26.0	-	10.3	18.0	-	519
40-3M-06	40	6F	AL	38.20	37.44	42.0	28.0	-	10.3	18.0	-	513
44-3M-06	44	6F	AL	42.02	41.26	48.0	33.0	-	10.3	18.0	-	520
48-3M-06	48	6	AL	45.84	45.08	-	33.0	-	10.3	18.6	8	-
60-3M-06	60	6	AL	57.30	56.54	-	33.0	-	10.3	18.6	8	-
72-3M-06	72	6	AL	68.75	67.99	-	33.0	-	10.3	18.6	8	-

HTD 3M-09 For belt width 09mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
10-3M-09	10	1F	AL	9.55	8.79	13.0	13.0	-	10.2	17.5	-	501
12-3M-09	12	1F	AL	11.46	10.70	15.0	15.0	-	10.2	17.5	-	502
14-3M-09	14	1F	AL	13.37	12.61	16.0	16.0	-	10.2	17.5	-	503
15-3M-09	15	1F	AL	14.32	13.56	17.5	17.5	-	10.2	17.5	-	516
16-3M-09	16	6F	AL	15.28	14.52	17.5	10.0	-	12.8	20.6	-	504
18-3M-09	18	6F	AL	17.19	16.43	20.0	11.0	-	12.8	20.6	-	505
20-3M-09	20	6F	AL	19.10	18.34	23.0	13.0	-	12.8	20.6	-	517
21-3M-09	21	6F	AL	20.05	19.29	25.0	13.0	-	12.8	20.6	-	518
22-3M-09	22	6F	AL	21.01	20.25	25.0	13.0	-	12.8	20.6	-	518



同步带轮 Timing Belt pulleys



直孔(HTD) Plain Bore(HTD)

3M齿形图

Tooth form diagram

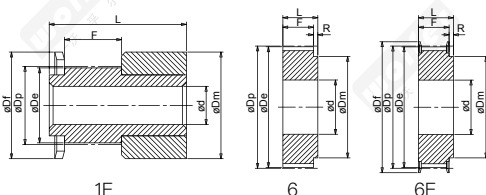

表示方法:

Representation method

24-3M-15-6F

轮形代号Pulley code

配带宽代号15mm

Matching belt width code 15mm

型号,节距3mm Type,Pitch

齿数 NO.OF Grooves

HTD 3M-09 For belt width 09mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
24-3M-09	24	6F	AL	22.92	22.16	25	13	-	12.8	20.6	-	518
26-3M-09	26	6F	AL	24.83	24.07	28	16	-	12.8	20.6	-	508
28-3M-09	28	6F	AL	26.74	25.98	32	18	-	12.8	20.6	-	509
30-3M-09	30	6F	AL	28.65	27.89	32	20	-	12.8	20.6	-	509
32-3M-09	32	6F	AL	30.56	29.80	36	22	-	12.8	20.6	-	510
36-3M-09	36	6F	AL	34.38	33.62	39	26	-	13.4	22.2	-	519
40-3M-09	40	6F	AL	38.20	37.44	42	28	-	13.4	22.2	-	513
44-3M-09	44	6F	AL	42.02	41.26	48	33	-	13.4	22.2	-	520
48-3M-09	48	6	AL	45.84	45.08	-	33	-	13.4	22.2	8	-
60-3M-09	60	6	AL	57.30	56.54	-	33	-	13.4	22.2	8	-
72-3M-09	72	6	AL	68.75	67.99	-	33	-	13.4	22.2	8	-

HTD 3M-15 For belt width 15mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
10-3M-15	10	1F	AL	9.55	8.79	13.0	13.0	-	17.0	26	-	501
12-3M-15	12	1F	AL	11.46	10.70	15.0	15.0	-	17.0	26	-	502
14-3M-15	14	1F	AL	13.37	12.61	16.0	16.0	-	17.0	26	-	503
15-3M-15	15	1F	AL	14.32	13.56	17.5	17.5	-	17.0	26	-	516
16-3M-15	16	6F	AL	15.28	14.52	17.5	10.0	-	19.5	26	-	504
18-3M-15	18	6F	AL	17.19	16.43	20.0	10.6	-	19.5	26	-	505
20-3M-15	20	6F	AL	19.10	18.34	23.0	12.4	-	19.5	26	-	517
21-3M-15	21	6F	AL	20.05	19.29	25.0	13.0	-	19.5	26	-	518
22-3M-15	22	6F	AL	21.01	20.25	25.0	13.0	-	19.5	26	-	518
24-3M-15	24	6F	AL	22.92	22.16	25.0	13.0	-	19.5	26	-	518
26-3M-15	26	6F	AL	24.83	24.07	28.0	16.0	-	19.5	26	-	508
28-3M-15	28	6F	AL	26.74	25.98	32.0	18.0	-	19.5	26	-	509
30-3M-15	30	6F	AL	28.65	27.89	32.0	20.0	-	19.5	26	-	509
32-3M-15	32	6F	AL	30.56	29.80	36.0	22.0	-	19.5	26	-	510
36-3M-15	36	6F	AL	34.38	33.62	39.0	26.0	-	20.0	30	-	519
40-3M-15	40	6F	AL	38.20	37.44	42.0	28.0	-	20.0	30	-	513
44-3M-15	44	6F	AL	42.02	41.26	48.0	33.0	-	20.0	30	-	520
48-3M-15	48	6	AL	45.84	45.08	-	33.0	-	20.0	30	8	-
60-3M-15	60	6	AL	57.30	56.54	-	33.0	-	20.0	30	8	-
72-3M-15	72	6	AL	68.75	67.99	-	33.0	-	20.0	30	8	-

同步带轮 Timing Belt pulleys


直孔(HTD) Plain Bore(HTD)

5M齿形图


Tooth form diagram



5M型齿形图



6F



6WF

表示方法:

Representation method

20-5M-15-6F

轮形代号Pulley code

配带宽代号15mm

Matching belt width code

15mm

型号节距5mm Type,Pitch

齿数 NO.OF Grooves

HTD 5M-09 For belt width 09mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
12-5M-09	12	6F	STEEL	19.10	17.96	23	12.0	-	14.5	20.0	-	14
14-5M-09	14	6F	STEEL	22.28	21.14	25	13.0	-	14.5	20.0	-	2
15-5M-09	15	6F	STEEL	23.87	22.73	28	16.0	-	14.5	20.0	-	4
16-5M-09	16	6F	STEEL	25.46	24.32	28	16.2	-	14.5	20.0	-	4
18-5M-09	18	6F	STEEL	28.65	27.51	32	20.0	-	14.5	20.0	-	6
20-5M-09	20	6F	STEEL	31.83	30.69	36	23.0	-	14.5	22.5	-	8
21-5M-09	21	6F	STEEL	33.42	32.28	38	24.0	-	14.5	22.5	-	9
22-5M-09	22	6F	STEEL	35.01	33.87	39	25.5	-	14.5	22.5	-	15
24-5M-09	24	6F	STEEL	38.20	37.06	42	27.0	-	14.5	22.5	-	13
26-5M-09	26	6F	STEEL	41.38	40.24	44	30.0	-	14.5	22.5	-	12
28-5M-09	28	6F	STEEL	44.56	43.42	48	30.5	-	14.5	22.5	-	11
30-5M-09	30	6F	STEEL	47.75	46.60	51	35.0	-	14.5	22.5	-	16
32-5M-09	32	6F	STEEL	50.93	49.79	54	38.0	-	14.5	22.5	8	18
36-5M-09	36	6F	STEEL	57.30	56.16	60	38.0	-	14.5	22.5	8	21
40-5M-09	40	6F	STEEL	63.66	62.52	71	38.0	-	14.5	22.5	8	25
44-5M-09	44	6w	AL	70.03	68.89	-	38.0	54	14.5	25.5	8	-
48-5M-09	48	6w	AL	76.39	75.25	-	45.0	61	14.5	25.5	8	-
60-5M-09	60	6w	AL	95.49	94.35	-	45.0	80	14.5	25.5	8	-
72-5M-09	72	6w	AL	114.59	113.45	-	45.0	100	14.5	25.5	8	-

HTD 5M-15 For belt width 15mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
12-5M-15	12	6F	STEEL	19.10	17.96	23	12.0	-	20.5	26	-	14
14-5M-15	14	6F	STEEL	22.28	21.14	25	13.0	-	20.5	26	-	2
15-5M-15	15	6F	STEEL	23.87	22.73	28	16.0	-	20.5	26	-	4
16-5M-15	16	6F	STEEL	25.46	24.32	28	16.2	-	20.5	26	-	4
18-5M-15	18	6F	STEEL	28.65	27.51	32	20.0	-	20.5	26	-	6
20-5M-15	20	6F	STEEL	31.83	30.69	36	23.0	-	20.5	26	-	8
21-5M-15	21	6F	STEEL	33.42	32.28	38	24.0	-	20.5	26	-	9
22-5M-15	22	6F	STEEL	35.01	33.87	39	25.5	-	20.5	26	-	15
24-5M-15	24	6F	STEEL	38.20	37.06	42	27.0	-	20.5	28	-	13
26-5M-15	26	6F	STEEL	41.38	40.24	44	30.0	-	20.5	28	-	12




同步带轮 Timing Belt pulleys


直孔(HTD) Plain Bore(HTD)

5M齿形图


Tooth form diagram



5M型齿形图



1F



6WF

表示方法:

Representation method

32-5M-25-6F

轮形代号Pulley code

配带宽代号25mm

Matching belt width code 25mm

型号, 节距5mm Type, Pitch

齿数 NO.OF Grooves

HTD 5M-15 For belt width 15mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
28-5M-15	28	6F	STEEL	44.56	43.42	48	30.5	-	20.5	28	-	11
30-5M-15	30	6F	STEEL	47.75	46.60	51	35.0	-	20.5	28	-	16
32-5M-15	32	6F	STEEL	50.93	49.79	54	38.0	-	20.5	28	8	18
36-5M-15	36	6F	STEEL	57.30	56.16	60	38.0	-	20.5	28	8	21
40-5M-15	40	6F	STEEL	63.66	62.52	71	38.0	-	20.5	28	8	25
44-5M-15	44	6w	AL	70.03	68.89	-	38.0	54	20.5	30	8	-
48-5M-15	48	6w	AL	76.39	75.25	-	45.0	61	20.5	30	8	-
60-5M-15	60	6w	AL	95.49	94.35	-	45.0	80	20.5	30	8	-
72-5M-15	72	6w	AL	114.59	113.45	-	45.0	100	20.5	30	8	-


HTD 5M-25 For belt width 25mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
12-5M-25	12	6F	STEEL	19.10	17.96	23	12.0	-	30.5	36.0	-	14
14-5M-25	14	6F	STEEL	22.28	21.14	25	13.0	-	30.5	36.0	-	2
15-5M-25	15	6F	STEEL	23.87	22.73	28	16.0	-	30.5	36.0	-	4
16-5M-25	16	6F	STEEL	25.46	24.32	28	16.2	-	30.5	36.0	-	4
18-5M-25	18	6F	STEEL	28.65	27.51	32	20.0	-	30.5	36.0	-	6
20-5M-25	20	6F	STEEL	31.83	30.69	36	23.0	-	30.5	36.0	-	8
21-5M-25	21	6F	STEEL	33.42	32.28	38	24.0	-	30.5	38.5	-	9
22-5M-25	22	6F	STEEL	35.01	33.87	39	25.5	-	30.5	38.5	-	15
24-5M-25	24	6F	STEEL	38.20	37.06	42	27.0	-	30.5	38.5	-	13
26-5M-25	26	6F	STEEL	41.38	40.24	44	30.0	-	30.5	38.5	-	12
28-5M-25	28	6F	STEEL	44.56	43.42	48	30.5	-	30.5	38.5	-	11
30-5M-25	30	6F	STEEL	47.75	46.60	51	35.0	-	30.5	38.5	-	16
32-5M-25	32	6F	STEEL	50.93	49.79	54	38.0	-	30.5	38.5	8	18
36-5M-25	36	6F	STEEL	57.30	56.16	60	38.0	-	30.5	38.5	8	21
40-5M-25	40	6F	STEEL	63.66	62.52	71	38.0	-	30.5	38.5	8	25
44-5M-25	44	6w	AL	70.03	68.89	-	38.0	54	30.5	40.5	8	-
48-5M-25	48	6w	AL	76.39	75.25	-	45.0	61	30.5	40.5	8	-
60-5M-25	60	6w	AL	95.49	94.35	-	45.0	80	30.5	40.5	8	-
72-5M-25	72	6w	AL	114.59	113.45	-	45.0	100	30.5	40.5	8	-


同步带轮 Timing Belt pulleys

直孔(HTD) Plain Bore(HTD)


8M型齿形图: Tooth form diagram




8M型齿形图



6A



6F



6WF

表示方法: Representation method

36 8M-20-6F

轮形代号 Pulley code

配带宽度代号20mm

Matching belt width

code 20mm

型号,节距 8mm

Type,pitch 8mm

齿数 NO.OF Grooves

HTD 8M-20 For belt width 20mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
22-8M-20	22	6F	STEEL	56.02	54.65	60	43	-	28	38	15	53
24-8M-20	24	6F	STEEL	61.12	59.75	66	45	-	28	38	15	69
26-8M-20	26	6F	STEEL	66.21	64.84	70	48	-	28	38	15	61
28-8M-20	28	6F	STEEL	71.30	69.92	75	50	-	28	38	15	79
30-8M-20	30	6F	STEEL	76.39	75.02	83	55	-	28	38	15	73
32-8M-20	32	6F	STEEL	81.49	80.16	87	60	-	28	38	15	76
34-8M-20	34	6F	STEEL	86.58	85.22	91	70	-	28	38	15	66
36-8M-20	36	6F	STEEL	91.67	90.30	97	75	-	28	38	15	68
38-8M-20	38	6F	STEEL	96.77	95.39	102	75	-	28	38	15	70
40-8M-20	40	6F	STEEL	101.86	100.49	106	75	-	28	38	15	77
44-8M-20	44	6F	STEEL	112.05	110.67	120	75	-	28	38	15	75
48-8M-20	48	6F	STEEL	122.23	120.86	128	75	-	28	38	15	78
56-8M-20	56	6WF	STEEL	142.60	141.23	150	80	116	28	38	15	85
64-8M-20	64	6WF	STEEL	162.97	161.60	168	80	137	28	38	15	90
72-8M-20	72	6WF	STEEL	183.35	181.97	192	80	158	28	38	15	97
80-8M-20	80	6W	CAST IRON	203.72	202.35	-	90	180	28	38	15	-
90-8M-20	90	6A	CAST IRON	229.18	227.81	-	90	204	28	38	15	-
112-8M-20	112	6A	CAST IRON	285.21	283.83	-	90	254	28	38	18	-
144-8M-20	144	6A	CAST IRON	366.69	365.32	-	90	336	28	38	20	-
168-8M-20	168	6A	CAST IRON	427.81	426.44	-	100	400	28	38	20	-
192-8M-20	192	6A	CAST IRON	488.92	487.55	-	100	460	28	38	20	-

HTD 8M-30 For belt width 30mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
22-8M-30	22	6F	STEEL	56.02	54.65	60	43	-	38	48	12	53
24-8M-30	24	6F	STEEL	61.12	59.75	66	45	-	38	48	12	69
26-8M-30	26	6F	STEEL	66.21	64.84	70	48	-	38	48	12	61
28-8M-30	28	6F	STEEL	71.30	69.92	75	50	-	38	48	15	79
30-8M-30	30	6F	STEEL	76.39	75.02	83	55	-	38	48	15	73
32-8M-30	32	6F	STEEL	81.49	80.16	87	60	-	38	48	15	76
34-8M-30	34	6F	STEEL	86.58	85.22	91	70	-	38	48	15	66
36-8M-30	36	6F	STEEL	91.67	90.30	97	75	-	38	48	15	68

同步带轮 Timing Belt pulleys




直孔(HTD) Plain Bore(HTD)


8M型齿形图: Tooth form diagram




8M型齿形图




6A



6F



6WF



10WF

表示方法: Representation method

64 8M-50-10WF

轮形代号Pulley code

配带宽度代号50mm

Matching belt width code 50mm

型号, 节距8mm Type, pitch 8mm

齿数 NO.OF Grooves

HTD 8M-30 For belt width 30mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
38-8M-30	38	6F	STEEL	96.77	95.39	102	75	-	38	48	15	70
40-8M-30	40	6F	STEEL	101.86	100.49	106	75	-	38	48	15	77
44-8M-30	44	6F	STEEL	112.05	110.67	120	75	-	38	48	15	75
48-8M-30	48	6F	STEEL	122.23	120.86	128	75	-	38	48	15	78
56-8M-30	56	6WF	STEEL	142.60	141.23	150	90	116	38	48	15	85
64-8M-30	64	6WF	STEEL	162.97	161.60	168	90	137	38	48	15	90
72-8M-30	72	6WF	STEEL	183.35	181.97	192	95	158	38	48	15	97
80-8M-30	80	6W	CAST IRON	203.72	202.35	-	100	180	38	48	15	-
90-8M-30	90	6A	CAST IRON	229.18	227.81	-	100	204	38	48	15	-
112-8M-30	112	6A	CAST IRON	285.21	283.83	-	100	254	38	48	18	-
144-8M-30	144	6A	CAST IRON	366.69	365.32	-	100	336	38	48	20	-
168-8M-30	168	6A	CAST IRON	427.81	426.44	-	100	400	38	48	20	-
192-8M-30	192	6A	CAST IRON	488.92	487.55	-	100	460	38	48	20	-


HTD 8M-50 For belt width 50mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
22-8M-50	22	6F	STEEL	56.02	54.65	60	43	-	60	70	12	53
24-8M-50	24	6F	STEEL	61.12	59.75	66	45	-	60	70	12	69
26-8M-50	26	6F	STEEL	66.21	64.84	70	48	-	60	70	15	61
28-8M-50	28	6F	STEEL	71.30	69.92	75	50	-	60	70	15	79
30-8M-50	30	6F	STEEL	76.39	75.02	83	55	-	60	70	15	73
32-8M-50	32	6F	STEEL	81.49	80.16	87	60	-	60	70	15	76
34-8M-50	34	6F	STEEL	86.58	85.22	91	70	-	60	70	15	66
36-8M-50	36	6F	STEEL	91.67	90.30	97	75	-	60	70	15	68
38-8M-50	38	6F	STEEL	96.77	95.39	102	75	-	60	70	15	70
40-8M-50	40	6F	STEEL	101.86	100.49	106	75	-	60	70	18	77
44-8M-50	44	6F	STEEL	112.05	110.67	120	75	-	60	70	18	75
48-8M-50	48	6F	STEEL	122.23	120.86	128	75	-	60	70	18	78
56-8M-50	56	10WF	STEEL	142.60	141.23	150	80	116	60	60	18	85
64-8M-50	64	10WF	STEEL	162.97	161.60	168	80	137	60	60	18	90
72-8M-50	72	10WF	STEEL	183.35	181.97	192	80	158	60	60	18	97


同步带轮 Timing Belt pulleys

直孔(HTD) Plain Bore(HTD)

8M型齿形图: Tooth form diagram



8M型齿形图

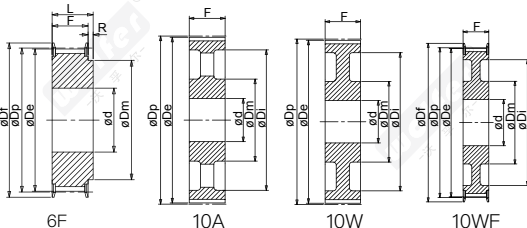

表示方法: Representation method



HTD 8M-50 For belt width 50mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
80-8M-50	80	10W	CAST IRON	203.72	202.35	-	110	180	60	60	18	-
90-8M-50	90	10A	CAST IRON	229.18	227.81	-	110	204	60	60	18	-
112-8M-50	112	10A	CAST IRON	285.21	283.83	-	110	254	60	60	18	-
144-8M-50	144	10A	CAST IRON	366.69	365.32	-	110	336	60	60	20	-
168-8M-50	168	10A	CAST IRON	427.81	426.44	-	120	400	60	60	20	-
192-8M-50	192	10A	CAST IRON	488.92	487.55	-	130	460	60	60	20	-

HTD 8M-85 For belt width 85mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
22-8M-85	22	6F	STEEL	56.02	54.65	60	43	-	95	105	12	53
24-8M-85	24	6F	STEEL	61.12	59.75	66	45	-	95	105	12	69
26-8M-85	26	6F	STEEL	66.21	64.84	70	48	-	95	105	12	61
28-8M-85	28	6F	STEEL	71.30	69.92	75	50	-	95	105	15	79
30-8M-85	30	6F	STEEL	76.39	75.02	83	55	-	95	105	15	73
32-8M-85	32	6F	STEEL	81.49	80.16	87	60	-	95	105	15	76
34-8M-85	34	6F	STEEL	86.58	85.22	91	66	-	95	105	15	66
36-8M-85	36	6F	STEEL	91.67	90.30	97	70	-	95	105	15	68
38-8M-85	38	6F	STEEL	96.77	95.39	102	75	-	95	105	15	70
40-8M-85	40	6F	STEEL	101.86	100.49	106	75	-	95	105	18	77
44-8M-85	44	6F	STEEL	112.05	110.67	120	75	-	95	105	18	75
48-8M-85	48	6F	STEEL	122.23	120.86	128	80	-	95	105	18	78
56-8M-85	56	6F	STEEL	142.60	141.23	150	90	-	95	105	18	85
64-8M-85	64	10WF	STEEL	162.97	161.60	168	100	137	95	95	20	90
72-8M-85	72	10WF	STEEL	183.35	181.97	192	100	158	95	95	20	97
80-8M-85	80	10W	CAST IRON	203.72	202.35	-	110	180	95	95	20	-
90-8M-85	90	10A	CAST IRON	229.18	227.81	-	110	204	95	95	20	-
112-8M-85	112	10A	CAST IRON	285.21	283.83	-	110	254	95	95	24	-
144-8M-85	144	10A	CAST IRON	366.69	365.32	-	110	336	95	95	24	-
168-8M-85	168	10A	CAST IRON	427.81	426.44	-	120	400	95	95	24	-
192-8M-85	192	10A	CAST IRON	488.92	487.55	-	130	460	95	95	24	-

同步带轮 Timing Belt pulleys




直孔(HTD) Plain Bore (HTD)


14M型齿形图: Tooth form diagram




14M型齿形图



6A




6F



6WF

表示方法: Representation method

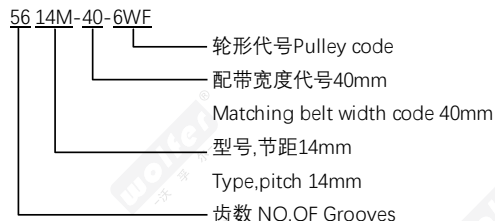

HTD 14M-40 For belt width 40mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
28-14M-40	28	6F	STEEL	124.78	121.92	128	100	-	54	69	24	153
29-14M-40	29	6F	STEEL	129.23	126.43	138	100	-	54	69	24	154
30-14M-40	30	6F	STEEL	133.69	130.89	138	100	-	54	69	24	154
32-14M-40	32	6F	STEEL	142.60	139.88	154	100	-	54	69	24	160
34-14M-40	34	6F	STEEL	151.52	148.79	160	100	-	54	69	24	166
36-14M-40	36	6F	STEEL	160.43	157.68	168	100	-	54	69	24	168
38-14M-40	38	6F	STEEL	169.34	166.60	183	120	-	54	69	24	172
40-14M-40	40	6F	STEEL	178.25	175.49	188	120	-	54	69	24	162
44-14M-40	44	6F	STEEL	196.08	193.28	211	120	-	54	69	24	175
48-14M-40	48	6WF	CAST IRON	213.90	211.11	226	135	170	54	69	24	180
56-14M-40	56	6WF	CAST IRON	249.55	246.76	256	135	207	54	69	28	182
64-14M-40	64	6WF	CAST IRON	285.21	282.41	296	135	240	54	69	28	184
72-14M-40	72	6A	CAST IRON	320.86	318.06	-	135	280	54	69	28	-
80-14M-40	80	6A	CAST IRON	356.51	353.71	-	135	314	54	69	28	-
90-14M-40	90	6A	CAST IRON	401.07	398.28	-	135	358	54	69	28	-
112-14M-40	112	6A	CAST IRON	499.11	496.32	-	135	456	54	69	28	-
144-14M-40	144	6A	CAST IRON	641.71	638.92	-	135	600	54	69	28	-
168-14M-40	168	6A	CAST IRON	748.66	745.87	-	135	706	54	69	28	-
192-14M-40	192	6A	CAST IRON	855.62	852.82	-	135	813	54	69	28	-
216-14M-40	216	6A	CAST IRON	962.57	959.76	-	150	920	54	69	28	-


HTD 14M-55 For belt width 55mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
28-14M-55	28	6F	STEEL	124.78	121.92	128	100	-	70	85	24	153
29-14M-55	29	6F	STEEL	129.23	126.43	138	100	-	70	85	24	154
30-14M-55	30	6F	STEEL	133.69	130.89	138	100	-	70	85	24	154
32-14M-55	32	6F	STEEL	142.60	139.88	154	100	-	70	85	24	160
34-14M-55	34	6F	STEEL	151.52	148.79	160	100	-	70	85	24	166
36-14M-55	36	6F	STEEL	160.43	157.68	168	100	-	70	85	24	168
38-14M-55	38	6F	STEEL	169.34	166.60	183	120	-	70	85	24	172
40-14M-55	40	6F	STEEL	178.25	175.49	188	120	-	70	85	24	162
44-14M-55	44	6F	STEEL	196.08	193.28	211	120	-	70	85	24	175


同步带轮 Timing Belt pulleys

直孔(HTD) Plain Bore(HTD)

14M型齿形图:Tooth form diagram



14M型齿形图

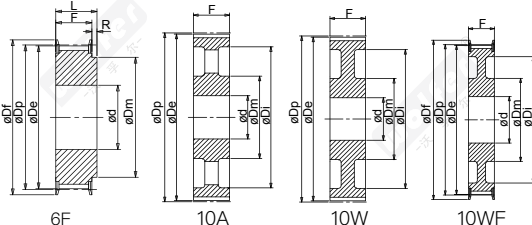

表示方法: Representation method

64-14M-85-10WF
 轮形代号 Pulley code
 配带宽度代号85mm
 Matching belt width code 85mm
 型号,节距14mm
 Type,Pitch 14mm
 齿数NO.OF Grooves

HTD 14M-55 For belt width 55mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
48-14M-55	48	10WF	CAST IRON	213.90	211.11	226	135	170	70	70	24	180
56-14M-55	56	10WF	CAST IRON	249.55	246.76	256	135	207	70	70	28	182
64-14M-55	64	10WF	CAST IRON	285.21	282.41	296	135	240	70	70	28	184
72-14M-55	72	10A	CAST IRON	320.86	318.06	-	135	280	70	70	28	-
80-14M-55	80	10A	CAST IRON	356.51	353.71	-	135	314	70	70	28	-
90-14M-55	90	10A	CAST IRON	401.07	398.28	-	135	358	70	70	28	-
112-14M-55	112	10A	CAST IRON	499.11	496.32	-	135	456	70	70	28	-
144-14M-55	144	10A	CAST IRON	641.71	638.92	-	135	600	70	70	28	-
168-14M-55	168	10A	CAST IRON	748.66	745.87	-	135	706	70	70	28	-
192-14M-55	192	10A	CAST IRON	855.62	852.82	-	135	813	70	70	28	-
216-14M-55	216	10A	CAST IRON	962.57	959.76	-	150	920	70	70	28	-

HTD 14M-85 For belt width 85mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
28-14M-85	28	6F	STEEL	124.78	121.92	128	100	-	102	117	24	153
29-14M-85	29	6F	STEEL	129.23	126.43	138	100	-	102	117	24	154
30-14M-85	30	6F	STEEL	133.69	130.89	138	100	-	102	117	24	154
32-14M-85	32	6F	STEEL	142.60	139.88	154	100	-	102	117	24	160
34-14M-85	34	6F	STEEL	151.52	148.79	160	100	-	102	117	24	166
36-14M-85	36	6F	STEEL	160.43	157.68	168	100	-	102	117	32	168
38-14M-85	38	6F	STEEL	169.34	166.60	183	120	-	102	117	32	172
40-14M-85	40	6F	STEEL	178.25	175.49	188	135	-	102	117	32	162
44-14M-85	44	6F	STEEL	196.08	193.28	211	135	-	102	117	32	175
48-14M-85	48	6F	STEEL	213.90	211.11	226	150	-	102	117	32	180
56-14M-85	56	10WF	CAST IRON	249.55	246.76	256	150	207	102	117	32	182
64-14M-85	64	10WF	CAST IRON	285.21	282.41	296	150	240	102	102	32	184
72-14M-85	72	10A	CAST IRON	320.86	318.06	-	150	278	102	102	32	-
80-14M-85	80	10A	CAST IRON	356.51	353.71	-	150	314	102	102	32	-
90-14M-85	90	10A	CAST IRON	401.07	398.28	-	150	358	102	102	32	-
112-14M-85	112	10A	CAST IRON	499.11	496.32	-	150	456	102	102	32	-
144-14M-85	144	10A	CAST IRON	641.71	638.92	-	150	600	102	102	32	-

同步带轮 Timing Belt pulleys




直孔(HTD) Plain Bore(HTD)

14M型齿形图: Tooth form diagram



14M型齿形图

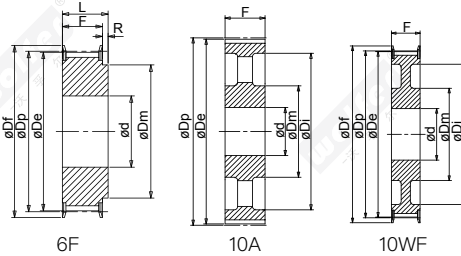

表示方法: Representation method

64-14M-115-10WF

—— 轮形代号 Pulley code

—— 配带宽度代号115mm

Matching belt width code 115mm

—— 型号,节距14mm

Type, Pitch 14mm

—— 齿数NO.OF Grooves

HTD 14M-115 For belt width 85mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
168-14M-85	168	10A	CAST IRON	748.66	745.87	-	150	706	102	102	32	-
192-14M-85	192	10A	CAST IRON	855.62	852.82	-	165	813	102	102	32	-
216-14M-85	216	10A	CAST IRON	962.57	959.76	-	160	920	133	102	32	-

HTD 14M-115 For belt width 115mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
28-14M-115	28	6F	STEEL	124.78	121.92	128	100	-	133	148	32	153
29-14M-115	29	6F	STEEL	129.23	126.43	138	100	-	133	148	32	154
30-14M-115	30	6F	STEEL	133.69	130.89	138	100	-	133	148	32	154
32-14M-115	32	6F	STEEL	142.60	139.88	154	100	-	133	148	32	160
34-14M-115	34	6F	STEEL	151.52	148.79	160	100	-	133	148	32	166
36-14M-115	36	6F	STEEL	160.43	157.68	168	100	-	133	148	32	168
38-14M-115	38	6F	STEEL	169.34	166.60	183	120	-	133	148	32	172
40-14M-115	40	6F	STEEL	178.25	175.49	188	135	-	133	148	32	162
44-14M-115	44	6F	STEEL	196.08	193.28	211	140	-	133	148	32	175
48-14M-115	48	6F	STEEL	213.90	211.11	226	150	-	133	148	32	180
56-14M-115	56	6F	STEEL	249.55	246.76	256	150	-	133	148	32	182
64-14M-115	64	10WF	CAST IRON	285.21	282.41	296	150	240	133	133	32	184
72-14M-115	72	10A	CAST IRON	320.86	318.06	-	150	278	133	133	32	-
80-14M-115	80	10A	CAST IRON	356.51	353.71	-	150	314	133	133	32	-
90-14M-115	90	10A	CAST IRON	401.07	398.28	-	150	358	133	133	32	-
112-14M-115	112	10A	CAST IRON	499.11	496.32	-	150	456	133	133	32	-
144-14M-115	144	10A	CAST IRON	641.71	638.92	-	165	600	133	133	32	-
168-14M-115	168	10A	CAST IRON	748.66	745.87	-	165	706	133	133	32	-
192-14M-115	192	10A	CAST IRON	855.62	852.82	-	165	813	133	133	32	-
216-14M-115	216	10A	CAST IRON	962.57	959.76	-	165	920	133	133	32	-

HTD 14M-115 For belt width 170mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
28-14M-170	28	6F	STEEL	124.78	121.92	128	100	-	187	202	32	153
29-14M-170	29	6F	STEEL	129.23	126.43	138	100	-	187	202	32	154
30-14M-170	30	6F	STEEL	133.69	130.89	138	100	-	187	202	32	154

同步带轮 Timing Belt pulleys




直孔(HTD) Plain Bore(HTD)


14M型齿形图：Tooth form diagram



HTD 14M-170 For belt width 170mm

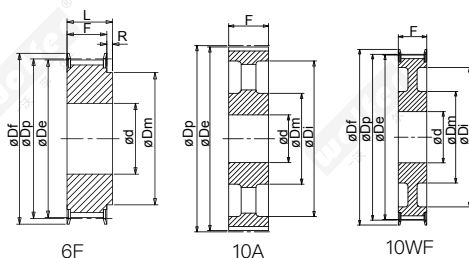

表示方法：Representation method

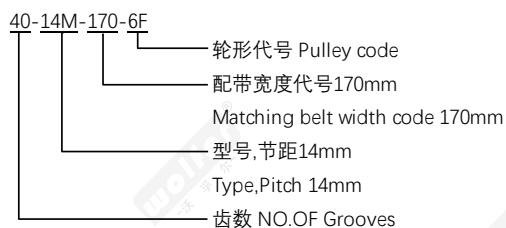

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	Dp	De	Df	Dm	Di	F	L	d	挡板号 Flange Code
32-14M-170	32	6F	STEEL	142.60	139.88	154	100	-	187	202	32	160
34-14M-170	34	6F	STEEL	151.52	148.79	160	100	-	187	202	32	166
36-14M-170	36	6F	STEEL	160.43	157.68	168	100	-	187	202	32	168
38-14M-170	38	6F	STEEL	169.34	166.60	183	120	-	187	202	32	172
40-14M-170	40	6F	STEEL	178.25	175.49	188	135	-	187	202	32	162
44-14M-170	44	6F	STEEL	196.08	193.28	211	140	-	187	202	32	175
48-14M-170	48	6F	CAST IRON	213.90	211.11	226	150	-	187	202	32	180
56-14M-170	56	6F	CAST IRON	249.55	246.76	256	150	-	187	202	32	182
64-14M-170	64	10WF	CAST IRON	285.21	282.41	296	150	240	187	187	32	184
72-14M-170	72	10A	CAST IRON	320.86	318.06	-	150	278	187	187	32	-
80-14M-170	80	10A	CAST IRON	356.51	353.71	-	150	314	187	187	32	-
90-14M-170	90	10A	CAST IRON	401.07	398.28	-	150	358	187	187	32	-
112-14M-170	112	10A	CAST IRON	499.11	496.32	-	150	456	187	187	32	-
144-14M-170	144	10A	CAST IRON	641.71	638.92	-	165	600	187	187	32	-
168-14M-170	168	10A	CAST IRON	748.66	745.87	-	165	706	187	187	32	-
192-14M-170	192	10A	CAST IRON	855.62	852.82	-	165	813	187	187	32	-
216-14M-170	216	10A	CAST IRON	962.57	959.76	-	165	920	187	187	32	-