



同步带轮 Timing Belt Pulleys

锥孔 (HTD)
Taper Bushes (HTD)






同步带轮 Timing Belt pulleys


锥孔(5M) Taper Bushes(5M)

5M型齿形图:


Tooth form diagram



5M型齿形图



3F



5F-1

表示方法:

Representation method

30 -5M -25-1108-5F

轮形代号Pulley code

锥套型号Bush

配带宽代号25mm

型号, 节距Type, Pitch

齿数 NO.OF Grooves

T5(Pitch=5mm) for belt width 25 mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	锥孔号 Bush Number	材料 Mat.	Dp	De	Df	Dm	Di	F	S	R	挡板号 Flange Code
30-5M-25	30	3F	1008	STEEL	47.75	46.61	51.0	-	-	31	-	-	16
32-5M-25	32	3F	1008	STEEL	50.93	49.79	54.0	-	-	31	-	-	18
34-5M-25	34	5F-1	1008	STEEL	54.11	52.97	60.0	-	-	31	22.4	8.6	21
36-5M-25	36	5F-1	1108	STEEL	57.3	56.16	60.0	-	-	31	23.0	8.0	21
40-5M-25	40	5F-1	1108	STEEL	63.66	62.52	70.0	-	-	31	23.0	8.0	26
44-5M-25	44	3F	1210	STEEL	70.03	68.89	75.0	-	-	32	-	-	27
45-5M-25	45	5F-1	1108	STEEL	71.62	70.48	75.0	-	-	31	23.0	8.0	27
48-5M-25	48	3F	1210	STEEL	76.39	75.25	82.5	-	-	32	-	-	64
50-5M-25	50	5F-1	1210	STEEL	79.58	78.44	83.0	-	-	32	25.5	6.5	29
60-5M-25	60	5F-1	1210	STEEL	95.49	94.35	102.0	-	-	32	25.0	7.0	70

同步带轮 Timing Belt pulleys


锥孔(HTD) Taper Bushes(HTD)

8M型齿形图


Tooth form diagram




8M型齿形图



3F



4




4F


表示方法

Representation method


TL40-8M-30-1615-8F
 轮形代号 Pulley code
 锥套型号 Bush
 配带宽度 30mm
 Matching belt width code 30mm
 型号, 节距 8mm Type, Pitch 8mm
 齿数 NO. OF Grooves




5F




7A




8F




8WF



8A



9W



9A

HTD 8M-30 For belt width 30mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat. Bush Number	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL38-8M-30	38	3F	STEEL	1615	96.77	95.39	102	-	-	38	38	-	70
TL40-8M-30	40	3F	STEEL	1615	101.86	100.49	106	-	-	38	38	-	77
TL44-8M-30	44	4F	STEEL	2012	112.05	110.67	120	-	86	38	32	3	75
TL48-8M-30	48	4F	STEEL	2012	122.23	120.86	128	-	90	38	32	3	78
TL56-8M-30	56	4F	STEEL	2012	142.60	141.23	150	-	110	38	32	3	85
TL64-8M-30	64	8F	STEEL	2517	162.97	161.60	168	125	-	38	45	7	90
TL72-8M-30	72	8WF	STEEL	2517	183.35	181.97	192	125	158	38	45	7	97
TL80-8M-30	80	8W	CAST IRON	2517	203.72	202.35	-	125	180	38	45	7	-
TL90-8M-30	90	8A	CAST IRON	2517	229.18	227.81	-	125	204	38	45	7	-
TL112-8M-30	112	8A	CAST IRON	2517	285.21	283.83	-	125	254	38	45	7	-
TL144-8M-30	144	8A	CAST IRON	2517	366.69	365.32	-	125	336	38	45	7	-

HTD 8M-50 For belt width 50mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL28-8M-50	28	4F	STEEL	1210	71.30	69.92	75	-	56	60	25	17.5	79
TL30-8M-50	30	5F	STEEL	1615	76.39	75.02	83	-	58	60	38	22	73
TL32-8M-50	32	5F	STEEL	1615	81.49	80.16	87	-	62	60	38	22	76
TL34-8M-50	34	SF	STEEL	1615	86.58	85.22	91	-	65	60	38	22	66
TL36-8M-50	36	SF	STEEL	1615	91.67	90.30	97	-	68	60	38	22	68
TL38-8M-50	38	SF	STEEL	1615	96.77	95.39	102	-	72	60	38	22	70
TL40-8M-50	40	4F	STEEL	2012	101.86	100.49	106	-	82	60	32	14	77
TL44-8M-50	44	4F	STEEL	2012	112.05	110.67	120	-	91	60	32	14	75
TL48-8M-50	48	4F	STEEL	2012	122.23	120.86	128	-	95	60	32	14	78
TL56-8M-50	56	4F	STEEL	2517	142.60	141.23	150	-	116	60	45	7.5	85
TL64-8M-50	64	4F	STEEL	2517	162.97	161.60	168	-	137	60	45	7.5	90
TL72-8M-50	72	9WF	STEEL	2517	183.35	181.97	192	125	158	60	45	7.5	97
TL80-8M-50	80	4	CAST IRON	3020	203.72	202.35	-	-	180	60	51	4.5	-
TL90-8M-50	90	9W	CAST IRON	3020	229.18	227.81	-	170	204	60	51	4.5	-
TL112-8M-50	112	9W	CAST IRON	3020	285.21	283.83	-	170	260	60	51	4.5	-
TL144-8M-50	144	9A	CAST IRON	3020	366.69	365.32	-	170	341	60	51	4.5	-
TL168-8M-50	168	7A	CAST IRON	3525	427.81	426.44	-	198	395	60	65	2.5	-
TL192-8M-50	192	7A	CAST IRON	3525	488.92	487.55	-	198	455	60	65	2.5	-



同步带轮 Timing Belt pulleys



锥孔(HTD) Taper Bushes(HTD)

8M型齿形图

Tooth form diagram

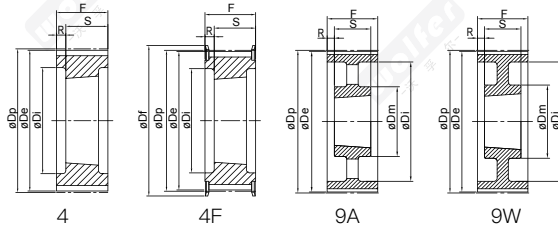

表示方法

Representation method

TL40-8M-85-2012-4F

轮形代号Pulley code

锥套型号Bush

配带宽代号85mm

Matching belt width code

85mm

型号, 节距8mm Type, Pitch

齿数 NO.OF Grooves

HTD 8M-85 For belt width 85mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL34-8M-85	34	4F	STEEL	1615	86.58	85.22	91	-	65	95	38	28.5	66
TL36-8M-85	36	4F	STEEL	1615	91.67	90.30	97	-	68	95	38	28.5	68
TL38-8M-85	38	4F	STEEL	1615	96.77	95.39	102	-	72	95	38	28.5	70
TL40-8M-85	40	4F	STEEL	2012	101.86	100.49	106	-	82	95	32	31.5	77
TL44-8M-85	44	4F	STEEL	2012	112.05	110.67	120	-	91	95	32	31.5	75
TL48-8M-85	48	4F	STEEL	2517	122.23	120.86	128	-	100	95	45	25.0	78
TL56-8M-85	56	4F	STEEL	2517	142.60	141.23	150	-	117	95	45	25.0	85
TL64-8M-85	64	4F	STEEL	2517	162.97	161.60	168	-	137	95	45	25.0	90
TL72-8M-85	72	4F	STEEL	3020	183.35	181.97	192	-	158	95	51	22.0	97
TL80-8M-85	80	4	CAST IRON	3020	203.72	202.35	-	-	180	95	51	22.0	-
TL90-8M-85	90	9W	CAST IRON	3020	229.18	227.81	-	170	204	95	51	22.0	-
TL112-8M-85	112	9W	CAST IRON	3020	285.21	283.83	-	170	260	95	51	22.0	-
TL144-8M-85	144	9A	CAST IRON	3525	366.69	365.32	-	198	336	95	65	15.0	-
TL168-8M-85	168	9A	CAST IRON	3525	427.81	426.44	-	198	395	95	65	15.0	-
TL192-8M-85	192	9A	CAST IRON	3525	488.92	487.55	-	198	455	95	65	15.0	-

同步带轮 Timing Belt pulleys


锥孔(HTD) Taper Bushes(HTD)

14M型齿形图

Tooth form diagram



14M型齿形图

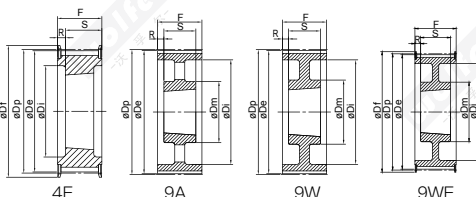

表示方法

Representation method

TL64-14M-40-3020-9WF

轮形代号Pulley code

锥套型号Bush

配带宽代号40mm

Matching belt width code 40mm

型号,节距14mm Type,Pitch 14mm

齿数 NO.OF Grooves

HTD 14M-40 For belt width 40mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	S	R	挡板号 Flange Code
TL28-14M-40	28	4F	STEEL	2012	124.78	121.92	128	-	94	54	32	11.0	153
TL29-14M-40	29	4F	STEEL	2012	129.23	126.43	138	-	98	54	32	11.0	154
TL30-14M-40	30	4F	STEEL	2012	133.69	130.89	138	-	98	54	32	11.0	154
TL32-14M-40	32	4F	STEEL	2012	142.60	139.88	154	-	108	54	32	11.0	160
TL34-14M-40	34	4F	STEEL	2517	151.52	148.79	160	-	110	54	45	4.5	166
TL36-14M-40	36	4F	STEEL	2517	160.43	157.68	168	-	120	54	45	4.5	168
TL38-14M-40	38	4F	STEEL	2517	169.34	166.60	183	-	130	54	45	4.5	172
TL40-14M-40	40	4F	STEEL	2517	178.25	175.49	188	-	138	54	45	4.5	162
TL44-14M-40	44	4F	STEEL	3020	196.08	193.28	211	-	155	54	51	1.5	175
TL48-14M-40	48	4F	STEEL	3020	213.90	211.11	226	-	170	54	51	1.5	180
TL56-14M-40	56	9WF	STEEL	3020	249.55	246.76	256	170	208	54	51	1.5	182
TL64-14M-40	64	9WF	CAST IRON	3020	285.21	282.41	296	170	240	54	51	1.5	184
TL72-14M-40	72	9W	CAST IRON	3020	320.86	318.06	-	170	280	54	51	1.5	-
TL80-14M-40	80	9A	CAST IRON	3020	356.51	353.71	-	170	315	54	51	1.5	-
TL90-14M-40	90	9A	CAST IRO N	3020	401.07	398.28	-	170	360	54	51	1.5	-
TL112-14M-40	112	9A	CAST IRON	3020	499.11	496.32	-	170	457	54	51	1.5	-
TL144-14M-40	144	9A	CAST IRON	3020	641.71	638.92	-	170	600	54	51	1.5	-
TL168-14M-40	168	9A	CAST IRON	3020	748.66	745.87	-	170	706	54	51	1.5	-
TL192-14M-40	192	9A	CAST IRON	3020	855.62	852.82	-	170	813	54	51	1.5	-
TL216-14M-40	216	9A	CAST IRON	3020	962.57	959.76	-	170	920	54	51	1.5	-

HTD 14M-55 For belt width 55mm



规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	S	R	挡板号 Flange Code
TL28-14M-55	28	4F	STEEL	2012	124.78	121.92	128	-	94	70	32	19.0	153
TL29-14M-55	29	4F	STEEL	2012	129.23	126.43	138	-	100	70	32	19.0	154
TL30-14M-55	30	4F	STEEL	2517	133.69	130.89	138	-	100	70	45	12.5	154
TL32-14M-55	32	4F	STEEL	2517	142.60	139.88	154	-	108	70	45	12.5	160
TL34-14M-55	34	4F	STEEL	2517	151.52	148.79	160	-	110	70	45	12.5	166
TL36-14M-55	36	4F	STEEL	2517	160.43	157.68	168	-	120	70	45	12.5	168
TL38-14M-55	38	4F	STEEL	2517	169.34	166.60	183	-	130	70	45	12.5	172
TL40-14M-55	40	4F	STEEL	2517	178.25	175.49	188	-	138	70	45	12.5	162
TL44-14M-55	44	4F	STEEL	3020	196.08	193.28	211	-	155	70	51	9.5	175
TL48-14M-55	48	4F	STEEL	3020	213.90	211.11	226	-	170	70	51	9.5	180
TL56-14M-55	56	9WF	STEEL	3020	249.55	246.76	256	170	208	70	51	9.5	182
TL64-14M-55	64	9WF	CAST IRON	3020	285.21	282.41	296	170	240	70	51	9.5	184
TL72-14M-55	72	9W	CAST IRON	3020	320.86	318.06	-	170	280	70	51	9.5	-
TL80-14M-55	80	9A	CAST IRON	3020	356.51	353.71	-	170	315	70	51	9.5	-

同步带轮 Timing Belt pulleys



锥孔(HTD) Taper Bushes(HTD)

14M型齿形图
Tooth form diagram

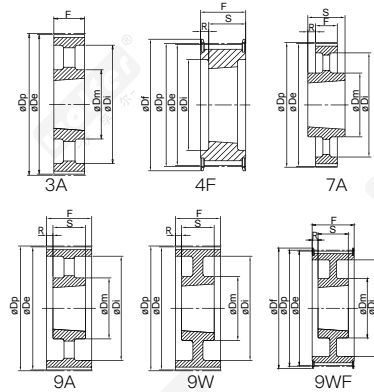

表示方法
Representation method

TL80-14M-85-3525-9A

轮形代号Pulley code
锥套型号Bush
配带宽代号85mm
Matching belt width
code 85mm
型号,节距14mm Type,
Pitch
齿数 NO.OF Grooves

HTD 14M-55 For belt width 55mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL90-14M-55	90	9A	CAST IRON	3020	401.07	398.28	-	170	360	70	51	9.5	-
TL112-14M-55	112	9A	CAST IRON	3020	499.11	496.32	-	170	457	70	51	9.5	-
TL144-14M-SS	144	9A	CAST IRON	3020	641.71	638.92	-	170	600	70	51	9.5	-
TL168-14M-55	168	9A	CAST IRON	3020	748.66	745.87	-	170	706	70	51	9.5	-
TL192-14M-55	192	9A	CAST IRON	3020	855.62	852.82	-	170	813	70	51	9.5	-
TL216-14M-55	216	7A	CAST IRON	3535	962.57	959.76	-	190	920	70	89	9.5	-

HTD 14M-85 For belt width 85mm


规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL28-14M-85	28	4F	STEEL	2517	124.78	121.92	128	-	98	102	45	28.5	153
TL29-14M-85	29	4F	STEEL	2517	129.23	126.43	138	-	100	102	45	28.5	154
TL30-14M-85	30	4F	STEEL	2517	133.69	130.89	138	-	100	102	45	28.5	154
TL32-14M-85	32	4F	STEEL	2517	142.60	139.88	154	-	108	102	45	28.5	160
TL34-14M-85	34	4F	STEEL	2517	151.52	148.79	160	-	110	102	45	28.5	166
TL36-14M-85	36	4F	STEEL	3020	160.43	157.68	168	-	120	102	51	25.5	168
TL38-14M-85	38	4F	STEEL	3020	169.34	166.60	183	-	130	102	51	25.5	172
TL40-14M-85	40	4F	STEEL	3020	178.25	175.49	188	-	138	102	51	25.5	162
TL44-14M-85	44	4F	STEEL	3020	196.08	193.28	211	-	153	102	51	25.5	175
TL48-14M-85	48	4F	STEEL	3020	213.90	211.11	226	-	170	102	51	25.5	180
TL56-14M-85	56	4F	STEEL	3525	249.55	246.76	256	-	210	102	65	18.5	182
TL64-14M-85	64	9WF	CAST IRON	3525	285.21	282.41	296	190	240	102	65	18.5	184
TL72-14M-85	72	9W	CAST IRON	3525	320.86	318.06	-	190	280	102	65	18.5	-
TL80-14M-85	80	9A	CAST IRON	3525	356.51	353.71	-	190	315	102	65	18.5	-
TL90-14M-85	90	9A	CAST IRON	3525	401.07	398.28	-	190	360	102	65	18.5	-
TL112-14M-85	112	9A	CAST IRON	3525	499.11	496.32	-	190	457	102	65	18.5	-
TL144-14M-85	144	9A	CAST IRON	3525	641.71	638.92	-	190	600	102	65	18.5	-
TL168-14M-85	168	9A	CAST IRON	3525	748.66	745.87	-	190	706	102	65	18.5	-
TL192-14M-85	192	3A	CAST IRON	4040	855.62	852.82	-	190	813	102	102	-	-
TL216-14M-85	216	3A	CAST IRON	4040	962.57	959.76	-	190	920	102	102	-	-

同步带轮 Timing Belt pulleys

锥孔(HTD) Taper Bushes(HTD)

14M型齿形图

Tooth form diagram

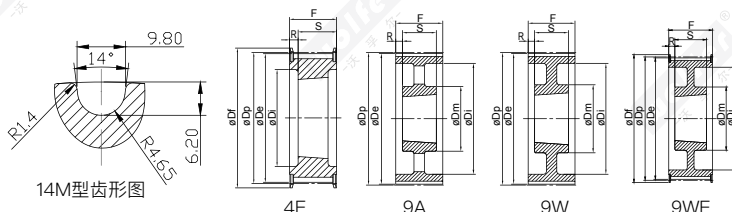

表示方法

Representation method

TL80-14M-170-4040-9W

— 轮形代号 Pulley code

— 锥套型号 Bush

— 配带宽代号 170mm

Matching belt width code

170mm

— 型号, 节距14mm Type, Pitch

— 齿数 NO.OF Grooves

HTD 14M-115 For belt width 115mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL28-14M-115	28	4F	STEEL	2517	124.78	121.92	128	-	98	133	45	44.0	153
TL29-14M-115	29	4F	STEEL	2517	129.23	126.43	138	-	100	133	45	44.0	154
TL30-14M-115	30	4F	STEEL	2517	133.69	130.89	138	-	100	133	45	44.0	154
TL32-14M-115	32	4F	STEEL	2517	142.60	139.88	154	-	108	133	45	44.0	160
TL34-14M-115	34	4F	STEEL	2517	151.52	148.79	160	-	110	133	45	44.0	166
TL36-14M-115	36	4F	STEEL	3020	160.43	157.68	168	-	125	133	51	41.0	168
TL38-14M-115	38	4F	STEEL	3020	169.34	166.60	183	-	130	133	51	41.0	172
TL40-14M-115	40	4F	STEEL	3020	178.25	175.49	188	-	138	133	51	41.0	162
TL44-14M-115	44	4F	STEEL	3020	196.08	193.28	211	-	155	133	76	28.5	175
TL48-14M-115	48	4F	STEEL	3020	213.90	211.11	226	-	170	133	76	28.5	180
TL56-14M-115	56	4F	STEEL	3535	249.55	246.76	256	-	208	133	89	22.0	182
TL64-14M-115	64	9WF	CAST IRON	3535	285.21	282.41	296	190	240	133	89	22.0	184
TL72-14M-115	72	9W	CAST IRON	3535	320.86	318.06	-	190	280	133	89	22.0	-
TL80-14M-115	80	9A	CAST IRON	3535	356.51	353.71	-	190	315	133	89	22.0	-
TL90-14M-115	90	9A	CAST IRON	3535	401.07	398.28	-	190	360	133	89	22.0	-
TL112-14M-115	112	9A	CAST IRON	3535	499.11	496.32	-	190	457	133	89	22.0	-
TL144-14M-115	144	9A	CAST IRON	4040	641.71	638.92	-	230	600	133	102	15.5	-
TL168-14M-115	168	9A	CAST IRON	4040	748.66	745.87	-	230	706	133	102	15.5	-
TL192-14M-115	192	9A	CAST IRON	4040	855.62	852.82	-	230	813	133	102	15.5	-
TL216-14M-115	216	9A	CAST IRON	4040	962.57	959.76	-	230	920	133	102	15.5	-

HTD 14M-170 For belt width 170mm

规格代码 Part Code	齿数 Number of Teeth	结构 Type	材料 Mat.	锥孔号 Bush Number	Dp	De	Df	Dm	Di	F	s	R	挡板号 Flange Code
TL38-14M-170	38	4F	STEEL	3030	169.34	166.60	183	-	130	187	76	55.5	172
TL40-14M-170	40	4F	STEEL	3030	178.25	175.49	188	-	138	187	76	55.5	162
TL44-14M-170	44	4F	STEEL	3535	196.08	193.28	211	-	153	187	89	49.0	175
TL48-14M-170	48	4F	STEEL	3535	213.90	211.11	226	-	170	187	89	49.0	180
TL56-14M-170	56	4F	STEEL	3535	249.55	246.76	256	-	208	187	89	49.0	182
TL64-14M-170	64	4F	CAST IRON	4040	285.21	282.41	296	-	240	187	102	42.5	184
TL72-14M-170	72	9W	CAST IRON	4040	320.86	318.06	-	230	280	187	102	42.5	-
TL80-14M-170	80	9W	CAST IRON	4040	356.51	353.71	-	230	315	187	102	42.5	-
TL90-14M-170	90	9A	CAST IRON	4040	401.07	398.28	-	230	360	187	102	42.5	-
TL112-14M-170	112	9A	CAST IRON	5050	499.11	496.32	-	265	457	187	127	30.0	-
TL144-14M-170	144	9A	CAST IRON	5050	641.71	638.92	-	265	600	187	127	30.0	-
TL168-14M-170	168	9A	CAST IRON	5050	748.66	745.87	-	265	706	187	127	30.0	-
TL192-14M-170	192	9A	CAST IRON	5050	855.62	852.82	-	265	813	187	127	30.0	-
TL216-14M-170	216	9A	CAST IRON	5050	962.57	959.76	-	265	920	187	127	30.0	-