


链轮 Sprocket

链轮 Sprocket

锥套式链轮 DIN 8187/ISO/R606

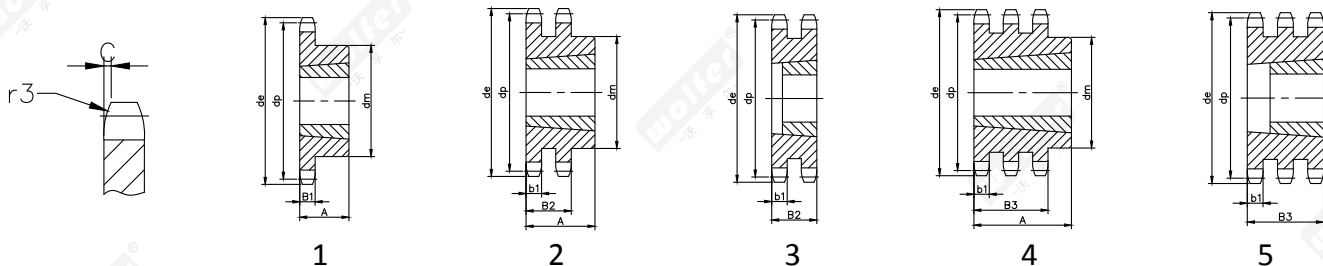

3/8"x7/32" (06B)		z	de	dp	单排				双排				三排			
					dm	A	锥套	图例	dm	A	锥套	图例	dm	A	锥套	图例
轮齿	mm	17	55.5	51.83	45	22	1008	1	41	22	1008	2	-	25.6	1008	5
齿半径 r_3	10	19	61.6	57.86	45	22	1008	1	46	22	1008	2	-	25.6	1008	5
半径宽C	1	21	67.6	63.90	46	22	1008	1	49	22	1008	2	-	25.6	1008	5
齿宽 B_1	5.3	23	73.7	69.95	63	25	1210	1	59	25	1210	2	-	25.6	1210	5
齿宽 b_1	5.2	25	79.7	75.99	63	25	1210	1	64	25	1210	2	-	25.6	1210	5
齿宽 B_2	15.4	27	85.7	82.04	63	25	1210	1	70	25	1210	2	-	25.6	1210	5
齿宽 B_3	25.6	30	94.8	91.12	63	25	1210	1	75	25	1210	2	79	38.0	1615	4
链条	mm	38	119	115.34	70	25	1210	1	80	25	1610	2	80	38.0	1615	4
节距	9.525															
内节内宽	5.72															
滚子直径	6.35															

1/2"x5/16" (08B)		z	de	dp	单排				双排				三排			
					dm	A	锥套	图例	dm	A	锥套	图例	dm	A	锥套	图例
轮齿	mm	15	66.5	61.09	45	22	1008	1	46	22	1008	2	-	34.9	1008	5
齿半径 r_3	13	17	74.5	69.11	60	25	1210	1	56	25	1210	2	-	34.9	1210	5
半径宽C	1.3	19	82.5	77.15	63	25	1210	1	62	25	1210	2	62	38.0	1215	4
齿宽 B_1	7.2	21	90.6	85.21	71	25	1610	1	70	25	1610	2	70	38.0	1615	4
齿宽 b_1	7	23	98.7	93.26	76	25	1610	1	79	25	1610	2	70	38.0	1615	4
齿宽 B_2	21	25	106.7	101.32	76	25	1610	1	87	32	2012	2	-	34.9	2012	5
齿宽 B_3	34.9	27	114.8	109.39	76	25	1610	1	87	32	2012	2	-	34.9	2012	5
链条	mm	30	126.9	121.49	90	32	2012	1	87	32	2012	2	-	34.9	2012	5
节距	12.7	38	159.2	153.79	90	32	2012	1	100	32	2012	2	-	34.9	2012	5
内节内宽	7.75															
滚子直径	8.51															



链轮 Sprocket

链轮 Sprocket

锥套式链轮 DIN 8187/ISO/R606

锥套式链轮 5/8"×3/8" (10B)	轮齿mm 齿半径r36 半径宽C1.6 齿宽B19.1 齿宽b19 齿宽B225.5 齿宽B342.1 链条mm 节距15.875 内节内宽9.65 滚子直径10.16	z	de	dp	单排				双排				三排			
		dm	A	锥套	图例	dm	A	锥套	图例	dm	A	锥套	图例			
		13	73.2	66.33	47	22	1008	1	-	-	-	-	-	-	-	
		15	83.2	76.35	60	25	1210	1	-	25.5	1210	3	-	42.1	1215	5
		17	93.3	86.39	71	25	1610	1	-	25.5	1610	3	-	42.1	1215	5
		19	103.3	96.44	75	25	1610	1	-	25.5	1610	3	-	42.1	1615	5
		21	113.4	106.51	76	25	1610	1	-	25.5	1610	3	-	42.1	1615	5
		23	123.5	116.58	76	25	1610	1	-	25.5	1610	3	-	42.1	2012	5
		25	133.6	126.66	90	32	2012	1	90	32.0	2012	2	105	44.0	2517	4
		27	143.6	136.74	90	32	2012	1	90	32.0	2012	2	110	44.0	2517	4
		30	158.8	151.87	90	32	2012	1	90	32.0	2012	2	120	44.0	2517	4
		38	199.1	192.23	100	32	2012	1	108	44.0	2517	2				

锥套式链轮 3/4"×7/16" (12B)	轮齿mm 齿半径r319 半径宽C2 齿宽B111.1 齿宽b110.8 齿宽B230.3 齿宽B349.8 链条mm 节距19.05 内节内宽11.68 滚子直径12.07	z	de	dp	单排				双排				三排			
		dm	A	锥套	图例	dm	A	锥套	图例	dm	A	锥套	图例			
		13	87.8	79.60	60	25	1210	1	-	-	-	-	-	-	-	
		15	99.8	91.62	70	25	1610	1	71	38	1615	2	-	49.8	1615	5
		17	111.9	103.67	76	25	1610	1	80	38	1615	2	-	498	1615	5
		19	123.9	115.73	90	32	2012	1	90	32	2012	2	-	49.8	2012	5
		21	136.0	127.81	102	44	2517	1	108	44	2517	2	-	49.8	2517	5
		23	148.1	139.90	108	44	2517	1	108	44	2517	2	-	49.8	2517	5
		25	160.2	151.99	108	44	2517	1	108	44	2517	2	-	49.8	2517	5
		27	172.3	164.09	108	44	2517	1	108	44	2517	2	140	51.0	3020	4
		30	190.4	182.24	108	44	2517	1	108	44	2517	2	140	51.0	3020	4
		38	238.9	230.69	108	44	2517	1	140	51	3020	2	140	51.0	3020	4

锥套式链轮 1"×17.02mm (16B)	轮齿mm 齿半径r326 半径宽C2.5 齿宽B116.2 齿宽b115.8 齿宽B247.7 齿宽B379.6 链条mm 节距25.4 内节内宽17.02 滚子直径15.88	z	de	dp	单排				双排				三排			
		dm	A	锥套	图例	dm	A	锥套	图例	dm	A	锥套	图例			
		13	117.7	106.13	73	38	1615	1	-	-	-	-	-	-	-	
		15	133.7	122.16	76	38	1815	1	-	47.7	2012	3	-	-	-	
		17	149.8	138.23	90	32	2012	1	-	47.7	2517	3	-	79.6	2517	5
		19	165.9	154.31	108	44	2517	1	-	47.7	2517	3	-	79.6	3030	5
		21	182.0	170.42	110	44	2517	1	140	51.0	3020	2	-	79.6	3030	5
		23	198.1	186.53	110	44	2517	1	140	51.0	3020	2	159	89.0	3535	4
		25	214.2	202.65	110	44	2517	1	140	51.0	3020	2	175	89.0	3535	4
		27	230.4	218.79	110	44	2517	1	140	51.0	3020	2	175	89.0	3535	4
		30	254.6	242.99	120	44	2517	1	140	76.0	3030	2	175	89.0	3535	4
		38	319.2	307.59	140	51	3020	1	140	76.0	3030	2	175	89.0	3535	4